

O-ring Mechanical Series

... HM67

● **Operational Conditions:**

Temperature: -30℃ +210℃

Pressure: ≤1.2MPa

Speed: ≤18m/s

● **Materials:**


Stationary Ring: Q2,B,U2

Rotary Ring: Q2,B,U2

Secondary Seal: P,E,V

Spring and Metal parts: F,G

● **Applications:** Clean water, sewage water, oil and other moderately corrosive fluids.

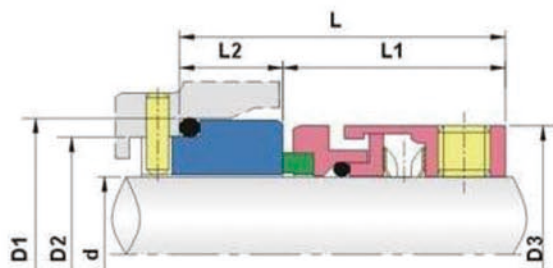

规格/Size 公制/Metric d	Code	D1	D2	D3	L1	L2	L
14	140	25.0	21.0	24.0	25.0	10.0	35.0
16	160	27.0	23.0	26.0	25.0	10.0	35.0
18	180	33.0	27.0	32.0	26.0	11.5	37.5
20	200	35.0	29.0	34.0	26.0	11.5	37.5
22	240	37.0	31.0	36.0	26.0	11.5	37.5
24	250	39.0	33.0	38.0	26.5	11.5	40.0
25	280	40.0	34.0	39.0	28.5	11.5	40.0
28	300	43.0	37.0	42.0	31.0	11.5	42.5
30	320	45.0	39.0	44.0	31.0	11.5	42.5
32	330	48.0	42.0	46.0	31.0	11.5	42.5
33	350	48.0	42.0	47.0	31.0	11.5	42.5
35	380	50.0	44.0	49.0	31.0	11.5	42.5
38	400	56.0	49.0	54.0	31.0	14.0	45.0
40	430	58.0	51.0	56.0	31.0	14.0	45.0
43	450	61.0	54.0	59.0	31.0	14.0	45.0
45	480	63.0	56.0	61.0	31.0	14.0	45.0
48	600	66.0	59.0	64.0	31.0	14.0	45.0
50	500	70.0	62.0	66.0	32.5	15.0	47.5
53	530	73.0	65.0	69.0	32.5	15.0	47.5
55	55	75.0	67.0	71.0	32.5	15.0	47.5
58	580	78.0	70.0	78.0	37.5	15.0	52.5
60	600	80.0	72.0	80.0	37.5	15.0	52.5
63	630	83.0	75.0	83.0	37.5	15.0	52.5
65	650	85.0	77.0	85.0	37.5	15.0	52.5
68	680	90.0	81.0	88.0	34.5	18.0	52.5
70	700	92.0	83.0	90.0	42.0	18.0	60.0
75	750	97.0	88.0	99.0	42.0	18.0	60.0
80	800	105.0	95.0	104.0	41.8	18.2	60.0
85	850	110.0	100.0	109.0	41.8	18.2	60.0
90	900	115.0	105.0	114.0	46.8	18.2	65.0
95	950	120.0	110.0	119.0	47.8	17.2	65.0
100	1000	125.0	115.0	124.0	47.8	17.2	65.0