


# HM103U

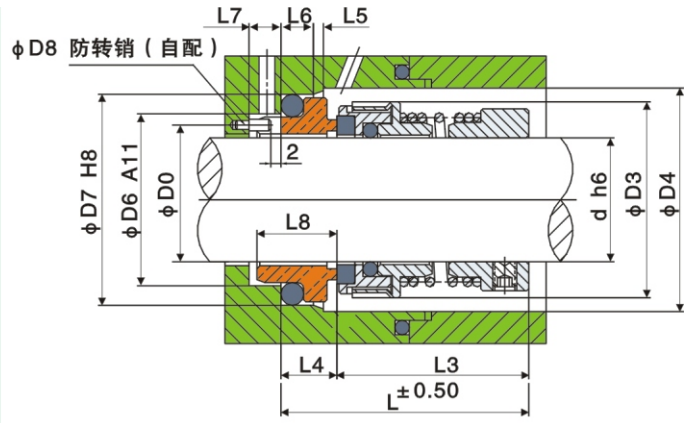

## 技术参数

- ▶ 封密介质：污水、酸、海水等带颗粒中性腐蚀液体
- ▶ 中质压力 ≤ 1.0N/Pa

- ▶ 结构特点：内装内流非平衡型弹簧传动
- ▶ 介质温度：-20℃ ~ +180℃

Technical Parameters  
 sealing medium sewage acid, seawater and other neutral corrosive liquid with granules  
 Medium temperature: -20℃~180℃  
 velocity ≤ 3000t/min  
 stinfilw mon equilibrium type

Model	d	D3	D4	D6	D7	D8	D0	L	L3	L4	L5	L6	L7	L8
HM103U-16	16	33	36	25	33	2	21	52	40	12	1.5	5.5	7.0	16
HM103U-18	18	35	38	28	36	2	23	56	44	12	1.5	5.5	7.0	16
HM103U-20	20	37	40	30	40	3	25	58	44	14	2.0	6.5	8.0	19
HM103U-22	22	39	42	32	42	3	27	62	48	14	2.0	6.5	8.0	19
HM103U-25	25	42	45	35	45	3	30	62	48	14	2.0	6.5	8.0	19
HM103U-28	28	45	48	38	48	3	33	64	50	14	2.0	6.5	8.0	19
HM103U-30	30	52	55	40	50	3	35	70	56	14	2.0	6.5	8.0	19
HM103U-35	35	57	60	45	55	3	40	74	60	14	2.0	6.5	8.0	19
HM103U-40	40	62	65	50	60	3	45	78	64	14	2.0	6.5	8.0	19
HM103U-45	45	67	70	55	65	3	50	85	71	14	2.0	6.5	8.0	19
HM103U-50	50	72	75	60	70	3	55	89	75	14	2.5	6.5	8.0	19
HM103U-55	55	77	80	65	75	3	60	91	77	14	2.5	6.5	8.0	19
HM103U-60	60	82	85	70	80	3	65	91	77	14	2.5	6.5	8.0	19
HM103U-65	65	92	95	80	90	3	73	106	89	17	2.5	6.5	8.0	22
HM103U-70	70	97	100	85	97	3	78	110	91	19	2.5	7.5	9.0	25
HM103U-75	75	102	105	90	102	3	83	110	91	19	2.5	7.5	9.0	25
HM103U-80	80	107	110	95	107	3	88	117	98	19	3.0	7.5	9.0	25
HM103U-85	85	112	115	100	112	3	93	119	100	19	3.0	7.5	9.0	25
HM103U-90	90	117	120	105	117	3	98	120	101	19	3.0	7.5	9.0	25
HM103U-95	95	122	125	110	122	3	103	120	101	19	3.0	7.5	9.0	25
HM103U-100	100	127	130	115	127	3	108	120	101	19	3.0	7.5	9.0	25
HM103U-110	110	141	145	130	142	3	120	147	126	21	3.0	8.0	9.0	27
HM103U-120	120	151	155	140	152	3	130	147	126	21	3.0	8.0	9.0	27