


HME

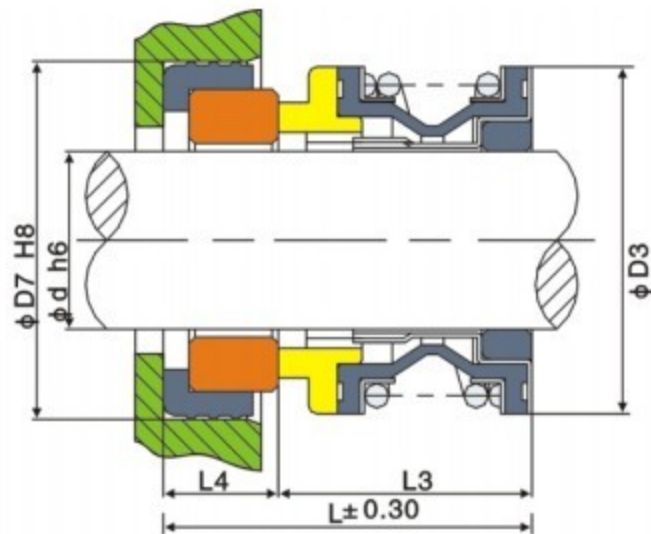

适用范围

- ▶ 密封腔温度: $t = -40^{\circ}\text{C} \sim 150^{\circ}\text{C}$
- ▶ 密封腔压力: $P \leq 0.5\text{MPa}$
- ▶ 转速: $n \leq 3600\text{r/min}$

Apply Range

- ▶ Annular Seal Temperature: $t = 40^{\circ}\text{C} \sim 150^{\circ}\text{C}$
- ▶ Annular Seal pressure: $p \leq 0.5\text{MPa}$
- ▶ Rotation speed: $n \leq 3600\text{r/min}$
- ▶ E9Uivalent to john crane type6、pcc-seal type16 us-seal type A

Model	d	D3	D7	L3	L4
HME-3/8"	0.375	1.062	1.000	0.656	0.312
HME-7/16"	0.437	1.062	1.000	0.656	0.312
HME-1/2"	0.500	1.062	1.000	0.656	0.312
HME-9/16"	0.562	1.218	1.250	0.718	0.406
HME-5/8"	0.625	1.128	1.250	0.718	0.406
HME-11/16"	0.687	1.343	1.375	0.718	0.406
HME-3/4"	0.750	1.343	1.375	0.718	0.406
HME-7/8"	0.875	1.687	1.625	0.812	0.437
HME-1"	1.000	1.687	1.625	0.812	0.437