


HM502

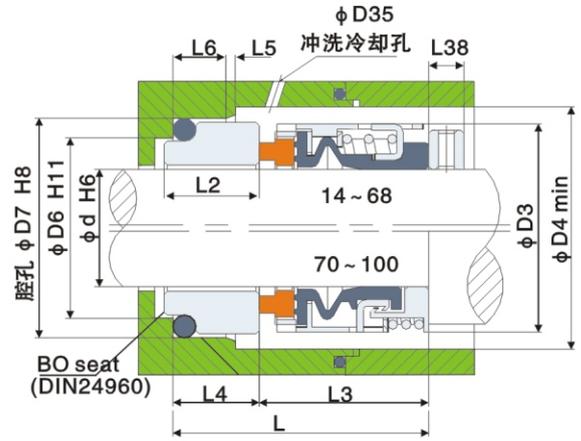

Elastomer Bellows Shaft Seals

Operational Conditions:
 Temperature: -20°C to $+120^{\circ}\text{C}$
 Pressure: $\leq 2.5\text{MPa}$
 Speed: $\leq 15\text{m/s}$

Materials:
 Stationary Ring: V1, Q1, Q2, U2, U1
 Rotary Ring: B, A, Q1, Q2, U1, U2
 Secondary Seal: P, E, V,
 Spring and Metal Parts: F, G

Seat Type:
 Standard: HMBO
 Alternative: HMBP
 Applications: Clean water,
 sewage water, oil and other
 moderately corrosive fluids.

Model	d	D3	D4	D6	D7	D35	L	L3	L4	L5	L6	L2	L38
HM502-14	14	24	26	21	25	6.5	35.0	23.0	12.0	1.5	4	12.5	5.0
HM502-16	16	26	28	23	27	6.5	35.0	23.0	12.0	1.5	4	12.5	5.0
HM502-18	18	32	34	27	33	6.5	37.5	24.0	13.5	2.0	5	14.5	7.5
HM502-20	20	34	36	29	35	6.5	37.5	24.0	13.5	2.0	5	14.5	7.5
HM502-22	22	36	38	31	37	6.5	37.5	24.0	13.5	2.0	5	14.5	7.5
HM502-24	24	38	40	33	39	6.5	40.0	26.7	13.3	2.0	5	14.5	7.5
HM502-25	25	39	41	34	40	6.5	40.0	27.0	13.0	2.0	5	14.0	7.5
HM502-28	28	42	44	37	43	6.5	42.5	30.0	12.5	2.0	5	13.5	7.5
HM502-30	30	44	46	39	45	6.5	42.5	30.5	12.0	2.0	5	13.0	7.5
HM502-32	32	46	48	42	48	6.5	42.5	30.5	12.0	2.0	5	13.0	8.0
HM502-33	33	47	49	42	48	6.5	42.5	30.5	12.0	2.0	5	13.0	8.0
HM502-35	35	49	51	44	50	6.5	42.5	30.5	12.0	2.0	5	13.0	8.0
HM502-38	38	54	58	49	56	6.5	45.0	32.0	13.0	2.0	6	14.0	10.0
HM502-40	40	56	60	51	58	6.5	45.0	32.0	13.0	2.0	6	14.0	10.0
HM502-43	43	59	63	54	61	6.5	45.0	32.0	13.0	2.0	6	14.0	12.0
HM502-45	45	61	65	56	63	6.5	45.0	32.0	13.0	2.0	6	14.0	12.0
HM502-48	48	64	68	59	66	6.5	45.0	32.0	13.0	2.0	6	14.0	12.0
HM502-50	50	66	70	62	70	6.5	47.5	34.0	13.5	2.5	6	14.5	12.0
HM502-53	53	69	73	65	73	6.5	47.5	34.0	13.5	2.5	6	14.5	12.0
HM502-55	55	71	75	67	75	6.5	47.5	34.0	13.5	2.5	6	14.5	12.0
HM502-58	58	78	83	70	78	6.5	52.5	39.0	13.5	2.5	6	14.2	14.0
HM502-60	60	80	85	72	80	6.5	52.5	39.0	13.5	2.5	6	14.2	14.0
HM502-63	63	83	88	75	83	6.5	52.5	39.0	13.5	2.5	6	14.2	14.0
HM502-65	65	85	90	77	85	6.5	52.5	39.0	13.5	2.5	6	14.2	14.0
HM502-68	68	88	93	81	90	6.5	52.5	39.0	13.5	2.5	7	14.2	14.0
HM502-70	70	89	95	83	92	6.5	60.0	45.5	14.5	2.5	7	15.2	14.0
HM502-75	75	96	104	88	97	6.5	60.0	45.5	14.5	2.5	7	15.2	14.0
HM502-80	80	104	109	95	105	6.5	60.0	45.0	15.0	3.0	7	15.2	14.0
HM502-85	85	108	114	100	110	6.5	60.0	45.0	15.0	3.0	7	15.7	14.0
HM502-90	90	114	119	105	115	6.5	60.0	50.0	15.0	3.0	7	15.7	14.0
HM502-95	95	118	124	110	120	6.5	65.0	50.0	15.0	3.0	7	15.7	14.0
HM502-100	100	124	129	115	125	6.5	65.0	50.0	15.0	3.0	7	15.7	14.0