

## Elastomer Bellows Mechanical Seals

### ... HMWB2

● **Operational Conditions:**

Temperature: -20 °C to +120 °C

Pressure: ≤ 0.5MPa

Speed: ≤ 10m/s

● **Materials:**


Stationary Ring: Q2,V2

Rotary Ring: Teflon, Q2

Secondary Seal: Teflon

Spring and Metal Parts: F,G

- **Applications:** Sulfuric acid, hydrocarbon acid, Phosphoric acid, acetic acid, and nitric acid With various degrees, etc.

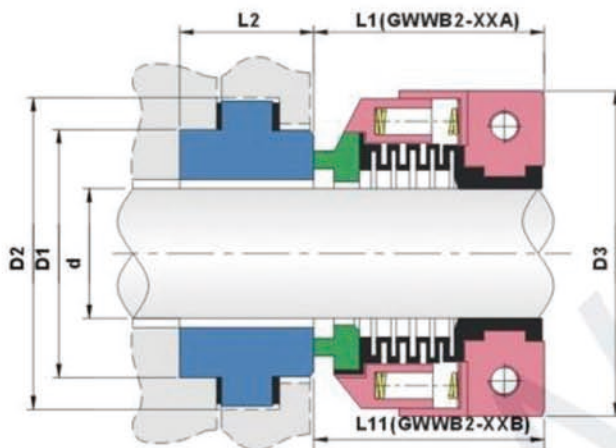

规格/Size (公制/Metric)	D3	D2	D1	L2	L1	L11
25	60	60	47	27	42	45
30	67	67	53	27	42	45
32	69	64	50.7	27	42	45
35	72	70	57	27	42	45
40	78	76	62	26	42	45
45	84	82	67	27	44	46
50	88	86	72	27	46	46
55	95	90	77	27	46	46
60	100	95	82	27	46	46
65	105	100	87	27	46	46

规格/Size (英制/Inch)	D3	D2	D1	L2	L1	L11
25.4	60	54	42.86	17.5	42	45
28.6	67	60	46.03	27	42	45
31.75	69	65	50.80	27	42	45
34.93	72	68	53.98	27	42	45
38.1	76	71	57.15	27	42	45
41.28	80	78	63.50	27	42	45
44.45	84	81	66.68	27	44	46
47.63	86	84	69.85	27	44	46
50.8	90	87	73.03	27	46	46
53.98	95	97	79.38	33.5	46	46
57.15	98	100	82.55	33.5	46	46
60.3	100	103	85.73	33.5	46	46