

Elastomer Bellows Mechanical Seals

... HMW10R, 10T

- **Operational Conditions:**

Temperature: -20℃ to +120℃

Pressure: ≤ 0.5MPa

Speed: ≤ 10m/s

- **Materials:**


Stationary Ring: Q2, V2

Rotary Ring: Teflon, Q2

Secondary Seal: Teflon

Spring and Metal Parts: F, G

- **Applications:** Sulfuric acid, hydrocarbon acid, Phosphoric acid, acetic acid, and nitric acid With various degrees, etc.

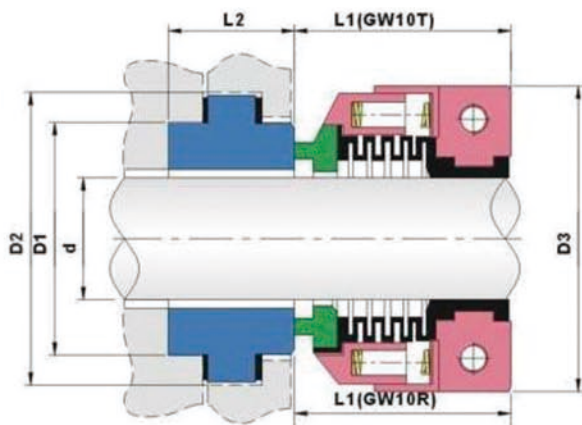

规格/Size (英制/Inch)	D3	D2	D1	L2	L1
25.4	60	54	42.86	17.6	33.2
28.6	67	65	50.80	27	36.2
31.75	69	68	53.98	27	37.2
34.93	72	71	57.15	27	38.2
38.1	76	78	63.50	27	38.2
41.28	80	81	66.68	27	40.2
44.45	84	84	69.85	27	40.2
47.63	86	87	73.03	27	43.2
50.8	90	97	79.38	33.3	43.2