


HMEA100



Type: Elastomeric bellow mechanical seal
 Replacement: Burgmann EA100
 Temperature: -20°C to +150°C
 Pressure: ≤0.4Mpa
 Speed: ≤10m/s
 Material: V,Q1,Q2,U2,U1,B,A,P,E,V,F,G

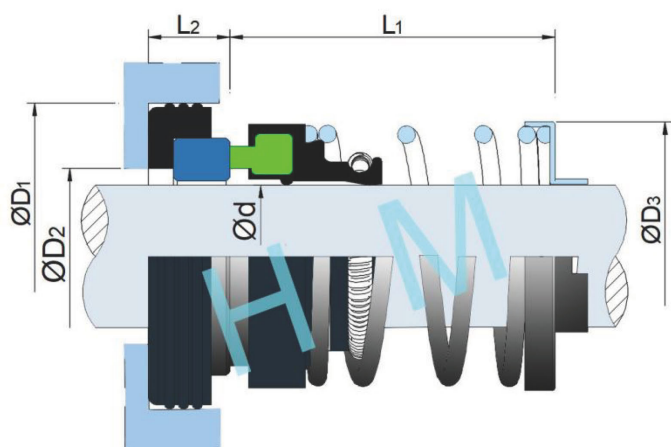

hengmi@mesel.com

d (mm)	D1	D2	D3	L1	L2
8	21	13	18.5	11	2
9	24	16	22.5	16	2
10	24	16	22.5	16	2
11	24	16	22.5	16	2
12	26	17	24.5	17	2
13	26	17	24.5	16	2
14	28	21	28.5	18	3
15	28	21	28.5	18	3
16	32	22	30.5	19	3
17	32	22	30.5	19	3
18	35	25	33.5	21	3
19	35	25	33.5	21	3
20	38	27	35.5	23	3