


# HM560A



Type: Elastomeric bellow mechanical seal  
 Replacement: Burgmann EA560  
 Temperature: -20°C to +100°C  
 Pressure: ≤1.0Mpa  
 Speed: ≤15m/s  
 Material: V,Q1,Q2,U2,U1,B,A,P,E,V,F,G

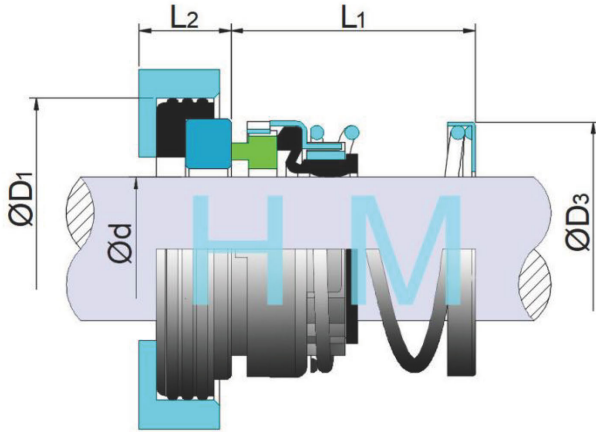

[hengmi@mesel.com](mailto:hengmi@mesel.com)

Size (mm)	d	D1	D3	L1	L2
560A-8	8	21	18.2	11.2	7
560A-9	9	24	18.2	16.2	7
560A-10	10	24	20.6	16.2	7
560A-11	11	24	20.6	16.2	7
560A-12	12	26	21.8	17.2	7
560A-13	13	26	21.8	17.2	7
560A-14	14	28	26.4	18.2	7
560A-15	15	28	26.4	18.2	7
560A-16	16	32	26.4	19.2	8
560A-17	17	32	29.5	19.2	8
560A-18	18	35	29.5	19.2	8
560A-19	19	35	29.5	19.2	8
560A-20	20	38	31.6	20.2	8
560A-22	22	40	33.6	20.2	8
560A-25	25	44	39.6	20.2	9
560A-28	28	46	45.0	21.2	9
560A-30	30	50	46.6	22.2	9
560A-32	32	54	46.6	24.2	9
560A-35	35	58	50.8	26.2	10
560A-38	38	60	54.3	27.2	10
560A-40	40	64	57.3	28.2	10
560A-45	45	66	61.3	30.2	10
560A-50	50	72	67.8	32.2	10