


HM301

Type: Elastomeric bellow mechanical seal
 Replacement: AES B01 , Vulcan 18 , Crane PR/DR,
 Burgmann BT-AR , Flowserve 118
 Temperature: -20°C to +120°C
 Pressure: ≤0.6Mpa
 Speed: ≤10m/s
 Material: V,Q1,Q2,U2,U1,B,A,P,E,V,F,G

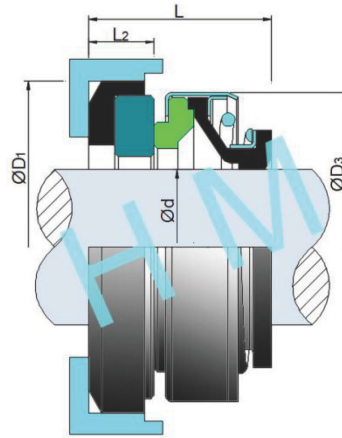

hengmi@meseal.com

Size (mm)	d	D3	D1	L	L2
6	6	18	18	14.0	4.0
8 S	8	18	22	15.0	4.0
8 M	8	20	22 / 26	15.0	4 / 5.5
8 L	8	24	26	15.0	5.5
10	10	24	26	21.0	8.0
11	11	24	26	21.0	8.0
12	12	24	25 / 26	21.0	8.0
13	13	24	26	19.5	5.5 / 8
13 L	13	28	28	21.0	8.0
13 H	13	32	29.5	30.5	8.0
14	14	28	28 / 28.5	21.0	8.0
14 L	14	32	29.5	21.0	8.0
15 S	15	28	28.5 / 30	21.0	8.0
15 M	15	32	30 / 29.5	21.0	8.0
15 L	15	39	38	21.0	8.0
16 S	16	28	29.5 / 30	21.0	8.0
16 M	16	32	29.5	21.0	8.0
16 L	16	39	38	21.0	8.0
16 H	16	32	30	21.0	10.0
17	17	39	42	21.0	8.0
18	18	39	42	21.0	8.0
19	19	39	42	21.0	8.0
20	20	39	42	21.0	8.0
20 L	20	42	45	23.0	10.0
22 S	22	36	45	26.5	10.0
22 L	22	42	45	23.0	10.0
23	23	47	50	23.5	10.0
24	24	47	50	23.5	10.0
25	25	42	50	23.5	10.0
25 L	25	47	50	23.5	10.0
26	26	47	50	23.5	10.0
27	27	47	50	23.5	10.0
28	28	54	57	25.0	10.0
30	30	54	57	25.0	10.0
32	32	54	57	25.0	10.0
35	35	60	63	26.0	10.0
38	38	65	68	30.0	12.0
40	40	65	68	30.0	12.0
45	45	70	73	32.0	12.0
50	50	85	88	38.0	15.0
55	55	85	88	38.0	15.0
60	60	105	110	45.0	15.0