


HM140/142/143



Type : Elastomeric bellow mechanical seal
 Replacement: VuI can 14 DIN/142 DIN/143 DIN,
 AESB05/B052/B053 , Flowserve
 140/142/143
 Temperature: -40°C to +150°C
 Pressure: ≤1.0Mpa
 Speed: ≤15m/s
 Material: V,Q1,Q2,U2,U1,B,A,P,E,V,F,G

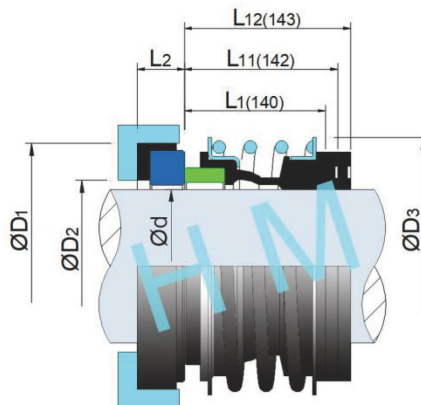

hengmi@meseal.com

d (mm)	D1	D2	D3	L1	L1 1	L2	L3
10	21	17	20	13.4	25.9	33.4	6.6
12	23	19	22	14.4	25.9	33.4	6.6
14	25	21	24	14.4	28.4	33.4	6.6
15	27	23	25	14.4	28.4	33.4	6.6
16	27	23	26	14.4	28.4	33.4	6.6
18	33	27	32	18.5	30.0	37.5	7.5
20	35	29	34	18.5	30.0	37.5	7.5
22	37	31	36	18.5	30.0	37.5	7.5
24	39	33	38	18.5	32.5	42.5	7.5
25	40	34	39	18.5	32.5	42.5	7.5
28	43	37	42	24.5	35.0	42.5	7.5
30	45	39	44	25.5	35.0	42.5	7.5
32	48	42	46	25.5	35.0	47.5	7.5
33	48	42	47	25.5	35.0	47.5	7.5
35	50	44	49	26.5	35.0	47.5	7.5
38	56	49	54	29.0	36.0	46.0	9.0
40	58	51	56	29.0	36.0	46.0	9.0
43	61	54	59	29.0	36.0	51.0	9.0
45	63	56	61	29.0	36.0	51.0	9.0
48	66	59	64	31.0	36.0	51.0	9.0
50	70	62	66	30.5	38.0	50.5	9.0
53	73	65	69	29.0	36.5	59.0	11.0
55	75	67	71	29.0	36.5	59.5	11.0
58	78	70	78	32.0	41.5	59.5	11.0
60	80	72	80	34.0	41.5	59.5	11.0
65	85	77	85	34.0	41.5	69.0	11.0
68	90	81	88	33.7	41.2	68.7	11.0
70	92	83	90	33.7	48.7	68.7	11.0
75	97	88	99	40.7	48.7	68.7	11.0
80	105	95	104	40.5	48.0	78.0	12.0
85	110	100	109	38.5	46.0	76.0	14.0
90	115	105	114	38.5	51.0	76.0	14.0
95	120	110	119	38.5	51.0	76.0	14.0
100	125	115	124	38.5	51.0	76.0	14.0