


HMBIA



Type: Elastomeric bellow mechanical seal
 Temperature: -20°C to $+120^{\circ}\text{C}$
 Pressure: $\leq 1.0\text{Mpa}$
 Speed: $\leq 15\text{m/s}$
 Material: V, Q1, Q2, U2, U1, B, A, P, E, V, F, G



hengmi@mesel.com

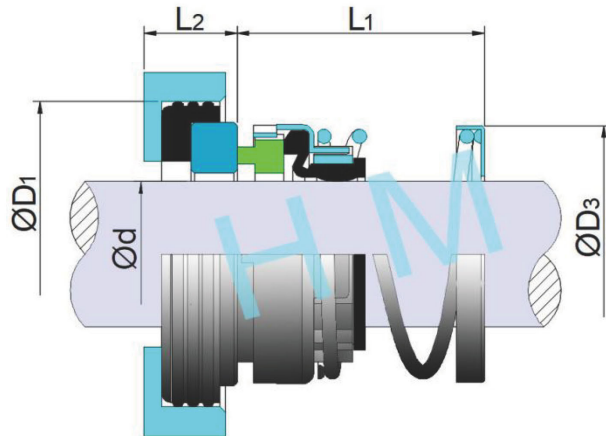

Size (mm)	d	D1	D3	L1	L2
BIA-14	14	30	27.5	19.0	5.0
BIA-16	16	32	28.5	21.0	5.0
BIA-18	18	35	31.2	22.5	7.5
BIA-20	20	35	31.7	21.0	8.0
BIA-25	25	40	40.2	25.5	8.0
BIA-28	28	43	44.1	25.5	8.0
BIA-30	30	45	45.1	25.5	9.0
BIA-32	32	48	49.0	33.5	9.0
BIA-33	33	48	49.0	33.5	9.0
BIA-35	35	50	50.2	33.5	9.0
BIA-38	38	56	55.3	33.5	9.0
BIA-40	40	58	57.0	33.5	9.0
BIA-43	43	61	60.7	36.5	9.5
BIA-45	45	63	62.5	38.5	9.5
BIA-48	48	66	66.5	38.0	9.5
BIA-50	50	70	68.6	38.0	9.5
BIA-53	53	73	70.8	41.0	9.5
BIA-55	55	75	72.4	41.0	9.5
BIA-58	58	78	80.0	42.0	9.5
BIA-60	60	80	83.0	42.0	9.5
BIA-65	65	85	87.2	42.0	10.0
BIA-70	70	92	91.6	45.0	11.0
BIA-75	75	97	99.4	47.0	12.0
BIA-80	80	104	104.6	55.0	12.0
BIA-85	85	109	111.0	64.0	12.0
BIA-90	90	114	113.0	66.0	12.0