


HM166T

Type: Elastomeric Bellows Mechanical Seal
Temperature: -20 to +120°C

Pressure: $\leq 1.0\text{Mpa}$

Speed: $\leq 15\text{m/s}$

Material: B,Q2,U2,P,E,N,V,F,G,Alfa

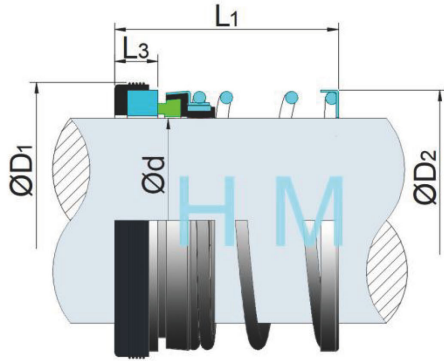

hengmi@mesel.com

d (mm)	D1	D2	L1	L3
12	27.80	23.3	34.1	8.7
16	30.95	30.1	35.7	10.3
20	35.70	36.3	35.7	10.3
22	37.30	36.3	35.7	10.3
24	40.50	39.4	35.7	10.3
25	40.50	39.4	35.7	10.3
28	47.65	44.4	45.2	11.9
30	50.80	47.6	45.2	11.9
32	50.80	47.6	45.2	11.9
35	54.00	50.8	45.2	11.9
38	57.15	54.0	45.2	11.9
40	60.35	60.3	45.2	11.9
46	63.50	66.7	52.4	11.9
48	66.70	66.7	52.4	11.9
50	69.85	66.7	54.0	13.5

HM166T

d (inch)	D1	D2	L1	L3
0.375	24.587	23.292	34.138	8.738
0.500	27.788	23.292	34.138	8.738
0.625	30.937	30.099	35.712	10.312
0.750	33.1/34.138	33.071	35.712	6.5/10.312
0.875	37.287	36.297	35.712	10.312
1.000	41.28/40.488	36.421	43.307	10.312
1.125	47.625	44.450	44.907	11.913
1.250	50.800	47.625	44.907	11.913
1.375	53.975	50.800	44.907	11.913
1.500	57.150	53.975	44.907	11.913
1.625	60.325	60.325	44.907	11.913
1.750	63.500	60.325	52.934	11.913
1.875	66.675	63.881	52.934	11.913
2.000	69.850	66.675	54.508	13.487

