

HM60/65



Type : Elastomeric bellows mechanical seal, Suit for Grundfos, Hilge Pumps


Replacement: Vu1can 60/65 , Burgmann BT-PNT, AES B04/B04U , Crane 106 , Roten 16, Flowserve 160

Temperature: -20°C to +120°C

Pressure : ≤ 0.5 Mpa

Speed: ≤ 10 m/s

Material: V, Q1, Q2, U2, U1, B, A, P, E, V, F, G

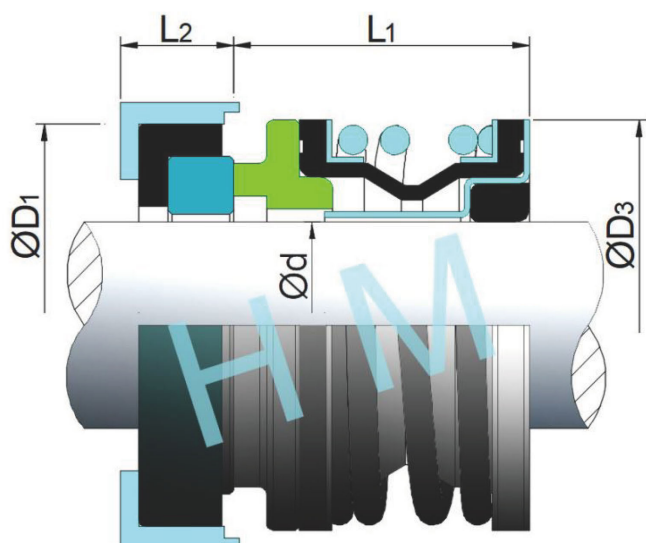

hengmi@meseal.com

Size (mm)	d	D1	D3	L1	L2
60/0.375	9.5	22.20	24.00	16.00	6.20
60/0.500	12.7	25.40	27.00	16.60	6.20
60/0.625	15.8	31.80	31.00	18.70	10.31
60/0.750	19.0	34.90	34.20	18.70	10.31
60/1.000	25.4	41.30	43.00	20.60	11.10
65/0.375	9.5	25.40	27.00	16.60	7.90
65/0.500	12.7	25.40	27.00	16.60	7.90
65/0.625	15.8	31.70	31.00	18.20	10.30
65/0.750	19.1	34.90	34.20	18.20	10.30
65/1.750	63.5	61.00	51.59	33.34	10.32