


HMBT-RN(Balanced Version)



Type: O-Ring Mechanical Seal
 Replacement: BURGMANN BT-RN(Balanced version)
 Temperature: -20 to +150°C
 Pressure: $\leq 1\text{Mpa}$
 Speed: $\leq 10\text{m/s}$
 Material: B,A1,Q1,Q2,U2,P,E,N,V,F,G,Alfa

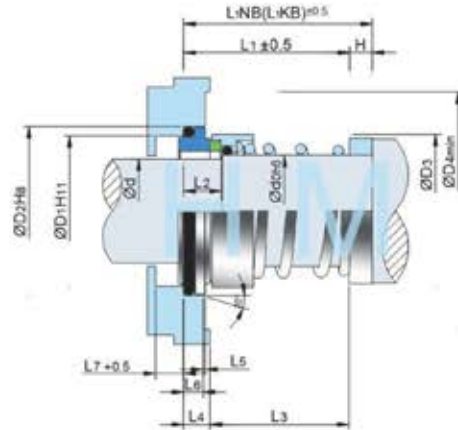

hengmi@meseal.com

BT- RN, NB																BT- RN, KB	
d (mm)	ØB	ØE	D1	D2	D3	D4	L1 NB	L1	L2	L3	L4	L5	L6	L7	H	L1 KB	L3
10	14	3	17	21	24	26	50	50	18	43	7	1.5	4	8.5	.	40.0	33.0
12	16	3	19	23	26	28	50	50	18	43	7	1.5	4	8.5	.	40.0	33.0
14	18	3	21	25	32	34	55	46	18	39	7	1.5	4	8.5	9	42.5	35.5
16	20	3	23	27	34	36	55	47	18	40	7	1.5	4	8.5	8	42.5	35.5
18	22	3	27	33	36	38	55	51	20	41	10	2.0	5	9.0	4	45.0	35.0
20	24	3	29	35	38	40	60	53	20	43	10	2.0	5	9.0	7	45.0	35.0
22	26	3	31	37	40	42	60	53	20	43	10	2.0	5	9.0	7	45.0	35.0
24	28	3	33	39	42	44	60	60	20	50	10	2.0	5	9.0	.	47.5	37.5
25	30	3	34	40	44	46	60	60	20	50	10	2.0	5	9.0	.	47.5	37.5
28	33	3	37	43	47	49	65	65	20	55	10	2.0	5	9.0	.	50.0	40.0
30	35	3	39	45	49	51	65	65	20	55	10	2.0	5	9.0	.	50.0	40.0
32	38	3	42	48	54	58	65	65	20	55	10	2.0	5	9.0	.	50.0	40.0
33	38	3	42	48	54	58	65	65	20	55	10	2.0	5	9.0	.	50.0	40.0
35	40	3	44	50	56	60	65	65	20	55	10	2.0	5	9.0	.	50.0	40.0
38	43	4	49	56	59	63	75	75	23	62	13	2.0	6	9.0	.	52.5	39.5
40	45	4	51	58	61	65	75	75	23	62	13	2.0	6	9.0	.	52.5	39.5
43	48	4	54	61	64	68	75	75	23	62	13	2.0	6	9.0	.	52.5	39.5
45	50	4	56	63	66	70	75	75	23	62	13	2.0	6	9.0	.	52.5	39.5
48	53	4	59	66	69	73	75	75	23	62	13	2.0	6	9.0	.	52.5	39.5
50	55	4	62	70	71	75	85	85	23	72	13	2.0	6	9.0	.	57.5	43.5
53	58	4	65	73	78	83	85	85	23	72	13	2.0	6	9.0	.	57.5	43.5
55	60	4	67	75	80	85	85	85	23	72	13	2.0	6	9.0	.	57.5	43.5
58	63	4	70	78	83	88	85	85	23	72	13	2.0	6	9.0	.	62.5	48.5
60	65	4	72	80	85	90	95	95	25	81	14	2.5	6	9.0	.	62.5	48.5
63	68	4	75	83	88	93	95	95	25	81	14	2.5	6	9.0	.	62.5	48.5
65	70	4	77	85	90	95	95	95	25	81	14	2.5	6	9.0	.	62.5	48.5
70	75	4	83	92	99	104	95	95	28	79	16	2.5	7	9.0	.	70.0	54.0
75	80	4	88	97	104	109	105	105	28	89	16	2.5	7	9.0	.	70.0	52.0
80	85	4	95	105	109	114	105	105	28	87	18	3.0	7	9.0	.	75.0	57.0
85	90	4	100	110	114	119	105	105	28	87	18	3.0	7	9.0	.	75.0	57.0
90	95	4	105	115	119	124	105	105	28	87	18	3.0	7	9.0	.	75.0	57.0
95	100	4	110	120	124	129	105	105	28	87	18	3.0	7	9.0	.	75.0	57.0
100	105	4	115	125	129	134	105	105	28	87	18	3.0	7	9.0	.	75.0	57.0