


HMX30(AX30)



Type: O-Ring Mechanical Seal
 Replacement: Burgmann AX30
 Temperature: -40 to +220°C
 Pressure: 20 Bar
 Speed: ≤15m/s
 Material: B,Q2,U2,P,E,N,V,F,G,Alfa

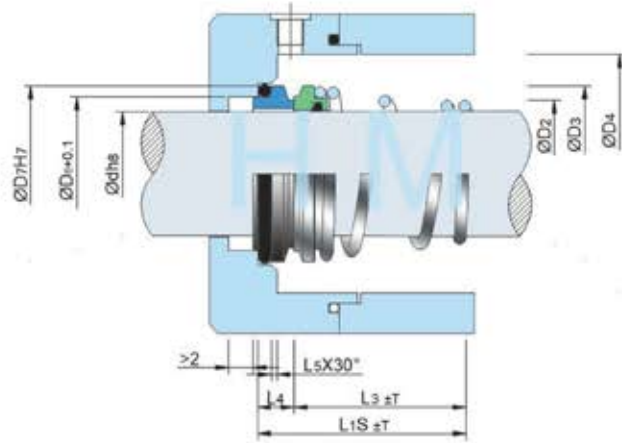

hengmi@mes seal.com

d (mm)	D1	D2	D3	D6	D7	L1S	L3	L4	L5	L6	T
10	13	22	24	15.5	19.2	22.5	15.0	7.5	1.2	3.8	0.5
12	15	24	26	17.5	21.6	23.0	15.0	8.0	1.2	3.8	0.5
14	17	26	28	20.5	24.6	23.0	15.0	8.0	1.2	3.8	0.5
15	18	27	29	20.5	24.6	24.0	16.0	8.0	1.2	3.8	0.5
16	19	28	30	22.0	28.0	26.5	17.0	9.5	1.5	5.0	0.5
18	22	33	35	24.0	30.0	28.5	19.0	9.5	1.5	5.0	0.5
20	24	35	37	29.5	35.0	29.5	18.5	11.0	1.5	5.0	0.5
22	26	37	39	29.5	35.0	31.0	21.5	9.5	1.5	5.0	2.0
24	28	39	41	32.0	38.0	32.5	23.0	9.5	1.5	5.0	2.0
25	29	41	43	32.0	38.0	34.0	24.5	9.5	1.5	5.0	2.0
26	30	42	44	34.0	40.0	34.5	24.0	10.5	1.5	5.0	2.0
28	32	44	46	36.0	42.0	35.5	26.0	9.5	1.5	5.0	2.0
30	34	46	48	39.2	45.0	35.5	24.5	11.0	1.5	5.0	2.0
32	36	48	50	42.2	48.0	39.0	28.0	11.0	1.5	5.0	2.0
35	39	52	54	46.2	52.0	39.5	28.5	11.0	1.5	5.0	2.0
38	44	56	60	49.2	55.0	42.5	31.5	11.0	1.5	5.0	2.0
40	46	58	62	52.2	58.0	45.5	24.5	11.0	1.5	5.0	2.0
42	48	60	64	53.3	62.0	49.0	35.0	14.0	2.0	6.0	2.0
45	51	64	68	55.3	64.0	50.5	36.5	14.0	2.0	6.0	2.0
48	54	67	71	59.7	68.4	56.0	42.0	14.0	2.0	6.0	2.0
50	56	69	73	60.8	69.3	57.0	43.0	14.0	2.0	6.0	2.0
55	61	75	79	66.5	75.4	62.0	47.0	15.0	2.0	6.0	2.0
58	66	80	85	69.5	78.4	65.0	50.0	15.0	2.0	6.0	2.0
60	68	82	87	71.5	80.4	66.0	51.0	15.0	2.0	6.0	2.0
65	73	87	92	76.5	85.4	67.0	52.0	15.0	2.0	6.0	2.0
68	76	91	95	82.7	91.5	69.0	54.0	15.0	2.0	6.0	2.0
70	78	93	97	83.0	92.0	69.0	52.0	17.0	2.0	6.0	2.0
75	83	101	106	90.2	99.0	70.0	53.0	17.0	2.0	6.0	2.0
80	88	106	111	95.2	104.0	74.0	57.0	17.0	2.0	6.0	2.0