


HMX25D(AX25D)

Type: O-Ring Mechanical Seal
 Replacement: Burgmann AX25D
 Temperature: -40 to +220°C
 Pressure: 16 Bar
 Speed: ≤20m/s
 Material: B,Q2,U2,P,E,N,V,F,G,Alfa

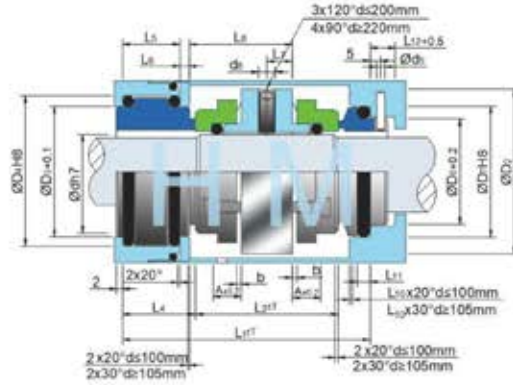

 hengmi@mesel.com

d (mm)	D3	D4	D6	D7	D2	d5	d8	L1	L2	L4	L5	L6	L7	L8	L9	L10	L11	T	A
20	29	35	29	35	47	3	M6	76	48	17	12	2	9	34	5	2	5	0.5	12
22	31	37	31	37	49	3	M6	76	48	17	12	2	9	34	5	2	5	0.5	12
24	33	39	33	39	51	3	M6	76	48	17	12	2	9	34	5	2	5	0.5	12
25	34	40	34	40	52	3	M6	76	48	17	12	2	9	34	5	2	5	0.5	12
28	37	43	37	43	55	3	M6	76	48	17	12	2	9	34	5	2	5	0.5	12
30	39	45	39	45	57	3	M6	76	48	17	12	2	9	34	5	2	5	0.5	12
32	42	48	42	48	59	3	M6	76	48	17	12	2	9	34	5	2	5	0.5	12
33	42	48	42	48	60	3	M6	76	48	17	12	2	9	34	5	2	5	0.5	12
35	44	50	44	50	62	3	M6	76	48	17	12	2	9	34	5	2	5	0.5	12
38	49	56	49	56	71	4	M8	84	52	19	14	2	9	36	5	2	6	0.5	13.5
40	51	58	51	58	73	4	M8	84	52	19	14	2	9	36	5	2	6	0.5	13.5
43	54	61	54	61	76	4	M8	84	52	19	14	2	9	36	5	2	6	0.5	13.5
45	56	63	56	63	78	4	M8	84	52	19	14	2	9	36	5	2	6	0.5	13.5
48	59	66	59	66	81	4	M8	84	52	19	14	2	9	36	5	2	6	0.5	13.5
50	62	70	62	70	83	4	M8	87.5	52	21	16	2	9	36	5	2.5	6	0.5	13.5
53	65	73	65	73	86	4	M8	87.5	52	21	16	2	9	36	5	2.5	6	0.5	13.5
55	67	75	67	75	88	4	M8	87.5	52	21	16	2	9	36	5	2.5	6	0.5	13.5
58	72	80	70	78	96	4	M10	99	62.5	22	16	2.5	9	44.5	5	2.5	6	1	15
60	75	83	72	80	100	4	M10	99	62.5	22	16	2.5	9	44.5	5	2.5	6	1	15
63	77	85	75	83	103	4	M10	99	62.5	22	16	2.5	9	44.5	5	2.5	6	1	15
65	81	90	77	85	105	4	M10	101	62.5	24	18	2.5	9	44.5	5	2.5	6	1	15
68	83	92	81	90	108	4	M10	101	62.5	24	18	2.5	9	44.5	5	2.5	7	1	15
70	88	97	83	92	111	4	M10	109	67	25	19	2.5	9	46.5	5	2.5	7	1	17.5
75	95	105	88	97	116	4	M10	109	67	25	19	2.5	9	46.5	5	2.5	7	1	17.5
80	100	110	95	105	121	4	M10	109	67	25	19	2.5	9	46.5	5	3	7	1	17.5
85	105	115	100	110	126	4	M10	109	67	25	19	2.5	9	46.5	5	3	7	1	17.5
90	110	120	105	115	131	4	M10	109	67	25	19	2.5	9	46.5	5	3	7	1	17.5
95	115	125	110	120	136	4	M10	109	67	25	19	2.5	9	46.5	5	3	7	1	17.5
100	120	130	115	125	141	4	M10	109	67	25	19	2.5	9	46.5	5	3	7	1	17.5
105	123	135	123	135	148	5	M10	124	76	28	22	2.5	10	50.5	5	2	10	2	21
110	128	140	128	140	153	5	M10	124	76	28	22	2.5	10	50.5	5	2	10	2	21
115	133	145	133	145	158	5	M10	124	76	28	22	2.5	10	50.5	5	2	10	2	21
120	140	152	140	152	171	5	M10	129	80.5	28	22	2.5	10	53.5	5	2	10	2	21
125	145	157	145	157	176	5	M10	129	80.5	28	22	2.5	10	53.5	5	2	10	2	21