


HM128



Type: O-Ring Mechanical Seal
 Temperature: -20 to +200°C
 Pressure: ≤0.8Mpa
 Speed: ≤10m/s
 Material: B,A1,Q1,Q2,U2,P,E,N,V,F,G,Alfa

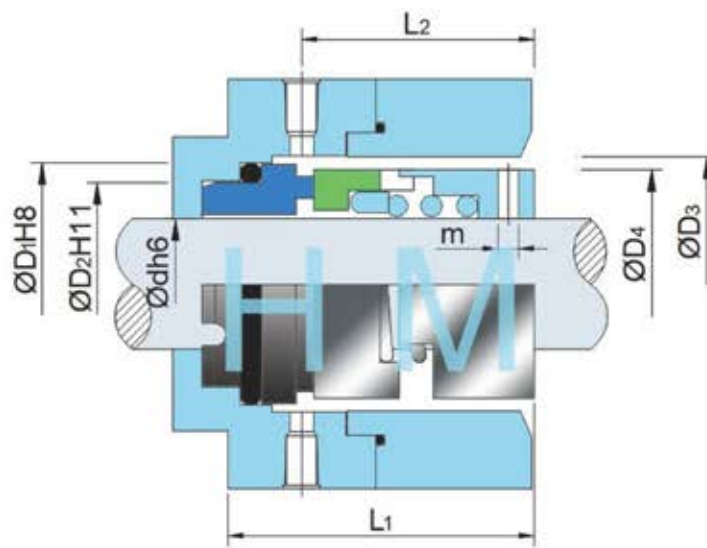

| d (mm) | D3 | D4 | D1 | D2 | L1 | L2 | m |
|-----------|----|----|----|----|----|----|---|
| 28 | 44 | 42 | 43 | 37 | 50 | 39 | 6 |
| 35 | 51 | 49 | 50 | 44 | 55 | 42 | 6 |
| 38 | 58 | 54 | 56 | 48 | 55 | 42 | 8 |
| 48 | 68 | 64 | 66 | 58 | 60 | 47 | 8 |
| 50 | 70 | 66 | 70 | 62 | 60 | 47 | 8 |
| 60 | 85 | 80 | 80 | 67 | 70 | 55 | 8 |