


HM105U/105B



Type : Multi Spring Mechanical Seal
 Temperature: -20 to +200°C
 Pressure : ≤ 3 Mpa
 Speed: ≤ 13 m/s
 Material : B,Q2,U2,P,E,N,V,F,G,Alfa


HM105U

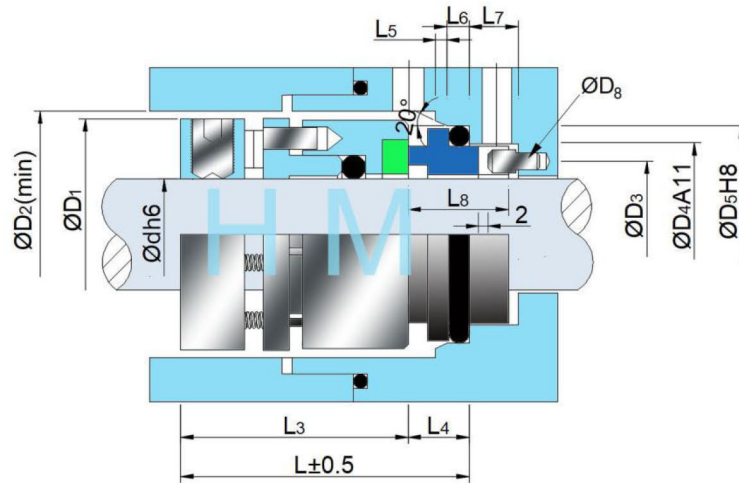

d (mm)	D1	D2	D3	D4	D5	D8	L	L3	L4	L5	L6	L7	L8
35	57	60	40	45	55	3	52	38	14	2.0	6.5	8	19
40	62	65	45	50	60	3	52	38	14	2.0	6.5	8	19
45	67	70	50	55	65	3	53	39	14	2.0	6.5	8	19
50	72	75	55	60	70	3	53	39	14	2.5	6.5	8	19
55	77	80	60	65	75	3	53	39	14	2.5	6.5	8	19
60	82	85	65	70	80	3	53	39	14	2.5	6.5	8	19
65	91	95	73	80	90	3	61	44	17	2.5	6.5	8	22
70	96	100	78	85	97	3	63	44	19	2.5	7.5	9	25
75	101	105	83	90	102	3	63	44	19	2.5	7.5	9	25
80	106	110	88	95	107	3	63	44	19	3.0	7.5	9	25
85	111	115	93	100	112	3	65	46	19	3.0	7.5	9	25
90	116	120	98	105	117	3	65	46	19	3.0	7.5	9	25
95	121	125	103	110	122	3	65	46	19	3.0	7.5	9	25
100	126	130	108	115	127	3	65	46	19	3.0	7.5	9	25
110	140	145	120	130	142	3	72	51	21	3.0	8.0	9	27
120	150	155	130	140	152	3	72	51	21	3.0	8.0	9	27

HM105U/105B

HM105B

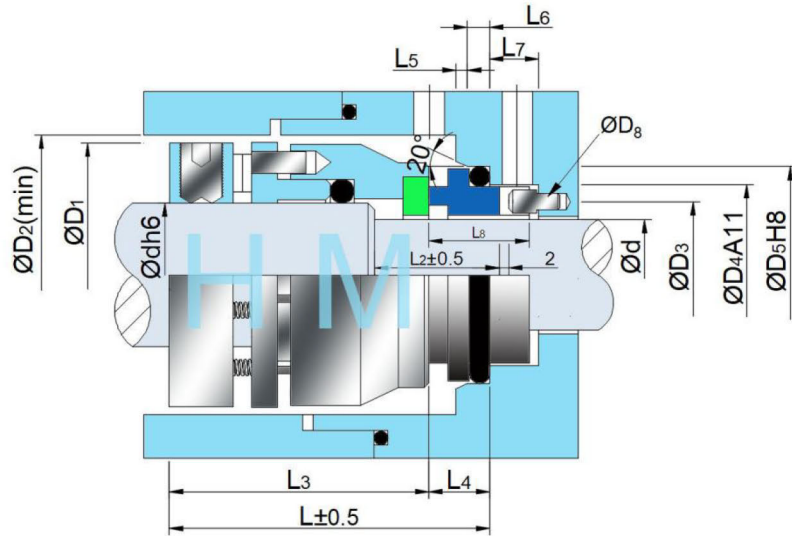

d (mm)	d0	D1	D2	D3	D4	D5	D8	L	L2	L3	L4	L5	L6	L7	L8
35	28	57	60	37	45	55	3	62	24	48	14	2.0	6.5	8	19
40	34	62	65	42	50	60	3	62	24	48	14	2.0	6.5	8	19
45	38	67	70	47	55	65	3	63	24	49	14	2.0	6.5	8	19
50	44	72	75	52	60	70	3	63	24	49	14	2.5	6.5	8	19
55	48	77	80	57	65	75	3	63	24	49	14	2.5	6.5	8	19
60	52	82	85	62	70	80	3	63	24	49	14	2.5	6.5	8	19
65	58	91	95	70	80	90	3	68	27	51	17	2.5	6.5	8	22
70	62.5	96	100	74	85	97	3	73	32	54	19	2.5	7.5	9	25
75	66	101	105	79	90	102	3	73	32	54	19	2.5	7.5	9	25
80	72	106	110	84	95	107	3	73	32	54	19	3.0	7.5	9	25
85	76	111	115	89	100	112	3	75	32	56	19	3.0	7.5	9	25
90	82	116	120	94	105	117	3	75	32	56	19	3.0	7.5	9	25
95	85	121	125	99	110	122	3	75	32	56	19	3.0	7.5	9	25
100	90	126	130	104	115	127	3	75	32	56	19	3.0	7.5	9	25
110	100	140	145	116	130	142	3	84	36	63	21	3.0	8.0	9	27
120	110	150	155	124	140	152	3	84	36	63	21	3.0	8.0	9	27