


HMHRN(HRN)

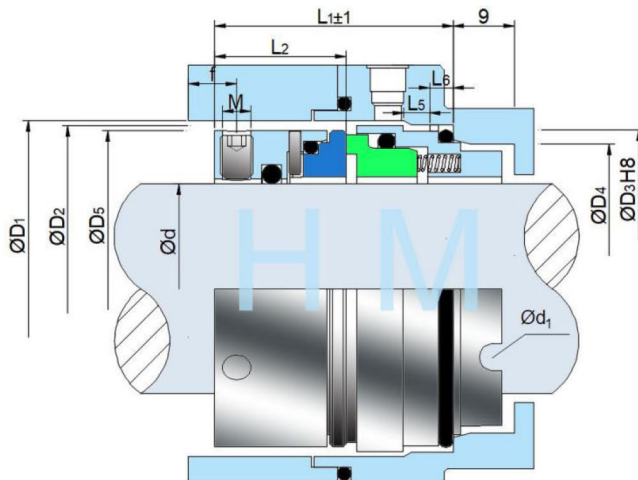

Type : Multi Spring Mechanical Seal
 Replacement : Burgmann HRN
 Temperature : -20°C to +220°C
 Pressure : ≤ 2.5 Mpa
 Speed : ≤ 10 m/s
 Material : Q2,B,U2,P,E,V,F,G

d (mm)	D5	D1	D4	D3	d1	D2	L1	L2	L5	L6	f	M
18	33	38	27	33	3	34.7	37.5	19.5	2.0	5	3.0	4
20	35	40	29	35	3	36.7	37.5	19.5	2.0	5	3.0	4
22	37	42	31	37	3	38.7	37.5	19.5	2.0	5	3.0	4
24	39	44	33	39	3	40.7	40.0	20.5	2.0	5	3.5	5
25	40	46	34	40	3	41.7	40.0	20.5	2.0	5	3.5	5
28	43	49	37	43	3	44.7	42.5	21.5	2.0	5	3.5	5
30	45	51	39	45	3	46.7	42.5	21.5	2.0	5	3.5	5
32	48	58	42	48	3	49.7	42.5	21.5	2.0	5	3.5	5
33	48	58	42	48	3	49.7	42.5	21.5	2.0	5	3.5	5
35	50	60	44	50	3	51.7	42.5	21.5	2.0	5	3.5	5
38	56	63	49	56	4	57.7	45.0	24.0	2.0	6	4.0	6
40	58	65	51	58	4	59.7	45.0	24.0	2.0	6	4.0	6
43	61	68	54	61	4	62.7	45.0	24.0	2.0	6	4.0	6
45	63	70	56	63	4	64.7	45.0	24.0	2.0	6	4.0	6
48	66	73	59	66	4	67.7	45.0	24.0	2.0	6	4.0	6
50	70	75	62	70	4	71.7	47.5	25.0	2.5	6	4.0	6
53	73	83	65	73	4	74.7	47.5	25.0	2.5	6	4.0	6
55	75	85	67	75	4	76.7	47.5	25.0	2.5	6	4.0	6
58	78	88	70	78	4	80.5	52.5	28.0	2.5	6	4.0	6
60	80	90	72	80	4	82.5	52.5	28.0	2.5	6	4.0	6
63	83	93	75	83	4	85.5	52.5	28.0	2.5	6	4.0	6
65	85	95	77	85	4	87.5	52.5	28.0	2.5	6	4.0	6
68	90	98	81	90	4	92.5	52.5	28.0	2.5	7	4.0	6
70	92	104	83	92	4	94.5	60.0	34.0	2.5	7	6.0	8
75	97	109	88	97	4	100.5	60.0	34.0	2.5	7	6.0	8
80	105	114	95	105	4	108.5	60.0	34.0	3.0	7	6.0	8
85	110	119	100	110	4	113.5	60.0	34.0	3.0	7	6.0	8
90	115	124	105	115	4	118.5	65.0	39.0	3.0	7	10.0	8
95	120	129	110	120	4	123.5	65.0	39.0	3.0	7	10.0	8
100	125	134	115	125	4	128.5	65.0	39.0	3.0	7	10.0	8