


HMBT-C7

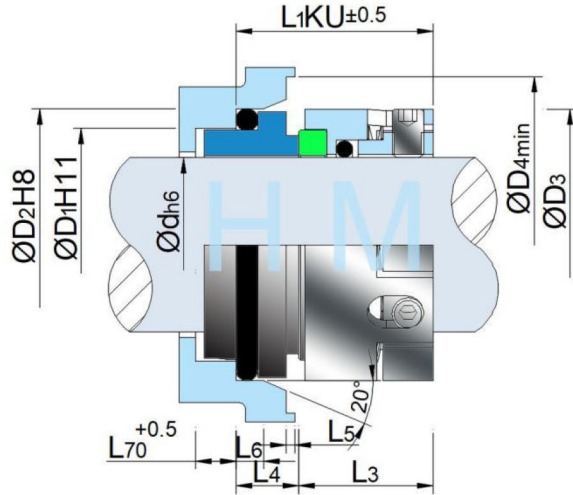

Type: Multi Spring Mechanical Seal
 Replacement: Burgmann BT-C7
 Temperature: -20 to +150°C
 Pressure: ≤1.5Mpa
 Speed: ≤15m/s
 Material: B, Q2, U2, P, E, N, V, F, G, Alfa

d (mm)	d8	D1	D2	D3	D4	L1 KU	L3	L4	L5	L6	L7
16	3	23	27	26	28	35.0	28.0	7	1.5	4	8.5
18	3	27	33	32	34	37.5	27.5	10	2.0	5	9.0
20	3	29	35	34	36	37.5	27.5	10	2.0	5	9.0
22	3	31	37	36	38	37.5	27.5	10	2.0	5	9.0
24	3	33	39	38	40	40.0	30.0	10	2.0	5	9.0
25	3	34	40	39	41	40.0	30.0	10	2.0	5	9.0
28	3	37	43	42	44	42.5	32.5	10	2.0	5	9.0
30	3	39	45	44	46	42.5	32.5	10	2.0	5	9.0
32	3	42	48	46	48	42.5	32.5	10	2.0	5	9.0
33	3	42	48	47	49	42.5	32.5	10	2.0	5	9.0
35	3	44	50	49	51	42.5	32.5	10	2.0	5	9.0
38	4	49	56	54	58	45.0	32.0	13	2.0	6	9.0
40	4	51	58	56	60	45.0	32.0	13	2.0	6	9.0
43	4	54	61	59	63	45.0	32.0	13	2.0	6	9.0
45	4	56	63	61	65	45.0	32.0	13	2.0	6	9.0
48	4	59	66	64	68	45.0	32.0	13	2.0	6	9.0
50	4	62	70	66	70	47.5	33.5	14	2.5	6	9.0
53	4	65	73	69	73	47.5	33.5	14	2.5	6	9.0
55	4	67	75	71	75	47.5	33.5	14	2.5	6	9.0
58	4	70	78	78	83	52.5	38.5	14	2.5	6	9.0
60	4	72	80	80	85	52.5	38.5	14	2.5	6	9.0
63	4	75	83	83	88	52.5	38.5	14	2.5	6	9.0
65	4	77	85	85	90	52.5	38.5	14	2.5	6	9.0
68	4	81	90	88	93	52.5	36.5	16	2.5	7	9.0
70	4	83	92	90	95	60.0	44.0	16	2.5	7	9.0
75	4	88	97	99	104	60.0	44.0	16	2.5	7	9.0
80	4	95	105	104	109	60.0	42.0	18	3.0	7	9.0
85	4	100	110	109	114	60.0	42.0	18	3.0	7	9.0
90	4	105	115	114	119	65.0	47.0	18	3.0	7	9.0
95	4	110	120	119	124	65.0	47.0	18	3.0	7	9.0
100	4	115	125	124	129	65.0	47.0	18	3.0	7	9.0