


# HMBT-C8

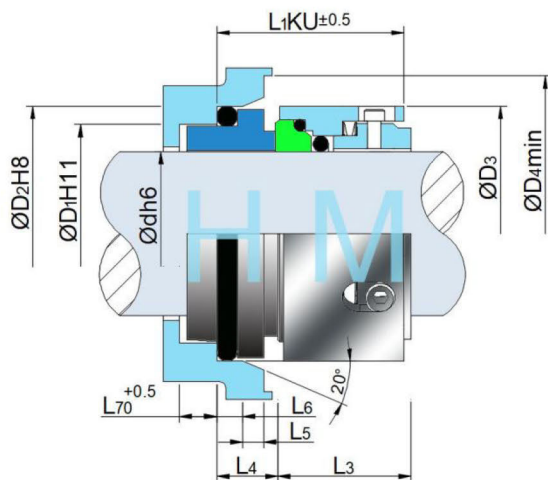

Type : Multi Spring Mechanical Seal  
 Replacement: Burgmann BT- C8  
 Temperature : -20 to +150°C  
 Pressure: ≤1.0Mpa  
 Speed: ≤10m/s  
 Material : B,A1,Q1,Q2,U2,P,E,N,V,F,G,Alfa

d (mm)	d8	D1	D2	D3	D4	L1 KU	L3	L4	L5	L6	L7
16	3	23	27	29	32	35.0	28.0	7	1.5	4	8.5
18	3	27	33	33	36	37.5	27.5	10	2.0	5	9.0
20	3	29	35	33	36	37.5	27.5	10	2.0	5	9.0
22	3	31	37	38	41	37.5	27.5	10	2.0	5	9.0
24	3	33	39	38	41	40.0	30.0	10	2.0	5	9.0
25	3	34	40	40	45	40.0	30.0	10	2.0	5	9.0
28	3	37	43	46	50	42.5	32.5	10	2.0	5	9.0
30	3	39	45	46	50	42.5	32.5	10	2.0	5	9.0
32	3	42	48	46	50	42.5	32.5	10	2.0	5	9.0
33	3	42	48	52	56	42.5	32.5	10	2.0	5	9.0
35	3	44	50	56	62	42.5	32.5	10	2.0	5	9.0
38	4	49	56	63	70	45.0	32.0	13	2.0	6	9.0
40	4	51	58	63	70	45.0	32.0	13	2.0	6	9.0
43	4	54	61	63	70	45.0	32.0	13	2.0	6	9.0
45	4	56	63	69	75	45.0	32.0	13	2.0	6	9.0
48	4	59	66	69	75	45.0	32.0	13	2.0	6	9.0
50	4	62	70	76	83	47.5	33.5	14	2.5	6	9.0
53	4	65	73	76	83	47.5	33.5	14	2.5	6	9.0
55	4	67	75	76	83	47.5	33.5	14	2.5	6	9.0
58	4	70	78	82	88	52.5	38.5	14	2.5	6	9.0
60	4	72	80	84	90	52.5	38.5	14	2.5	6	9.0
63	4	75	83	86	93	52.5	38.5	14	2.5	6	9.0
65	4	77	85	89	96	52.5	38.5	14	2.5	6	9.0
68	4	81	90	92	99	52.5	36.5	16	2.5	7	9.0
70	4	83	92	94	101	60.0	44.0	16	2.5	7	9.0
75	4	88	97	100	106	60.0	44.0	16	2.5	7	9.0
80	4	95	105	105	111	60.0	42.0	18	3.0	7	9.0
85	4	100	110	115	125	60.0	42.0	18	3.0	7	9.0
90	4	105	115	120	132	65.0	47.0	18	3.0	7	9.0
95	4	110	120	126	137	65.0	47.0	18	3.0	7	9.0
100	4	115	125	130	143	65.0	47.0	18	3.0	7	9.0