



HMSAI

Type: Multi Spring Mechanical Seal


Replacement: AES DIN SAI

Temperature : -50°C to +204°C

Pressure : ≤1.2Mpa

Speed : ≤15m/s

Material : V1,Q1,Q2,U2,B,A,P,E,V,M1,M2,F,G,M

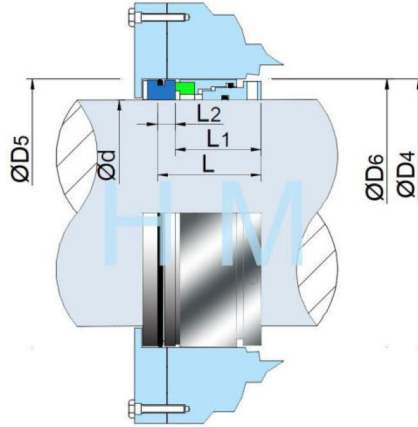

hengmi@meseal.com

d (mm)	L1	L	L2	D5	D6	D4
18	27.90	37.5	9.6	33	32	34
20	27.90	37.5	9.6	35	34	36
22	27.90	37.5	9.6	37	36	38
24	29.99	40.0	10.1	39	38	40
25	29.99	40.0	10.1	40	39	41
28	32.40	42.5	10.1	43	42	44
30	32.40	42.5	10.1	45	44	46
32	32.40	42.5	10.1	48	46	48
33	32.40	42.5	10.1	48	47	49
35	32.40	42.5	10.1	50	49	51
38	33.90	45.0	11.1	56	54	58
40	33.90	45.0	11.1	58	56	60
43	33.90	45.0	11.1	61	59	63
45	33.90	45.0	11.1	63	61	65
48	33.90	45.0	11.1	66	64	68
50	34.40	47.5	11.1	70	66	70
53	34.40	47.5	13.1	73	69	73
55	34.40	47.5	13.1	75	71	75
58	38.90	52.5	13.1	78	78	83
60	38.90	52.5	13.6	80	80	85
63	38.90	52.5	13.6	83	83	88
65	38.90	52.5	13.6	85	85	90
68	37.40	52.5	15.1	90	88	93
70	44.90	60.0	15.1	92	90	95
75	44.90	60.0	15.1	97	99	104
80	44.20	60.0	15.8	105	104	119
85	44.20	60.0	15.8	110	109	114
90	49.20	65.0	15.8	115	114	119
95	49.20	65.0	15.8	120	119	124
100	49.20	65.0	15.8	125	124	129