



HMDV




Type : Multi Spring Mechanical Seal Replacement:
Fluiten EDV

Temperature: -20 to +160°C

Pressure : ≤2.5Mpa

Speed: ≤10m/s

Material : Q2,U2,B,V1,P,E,V,F,G,G

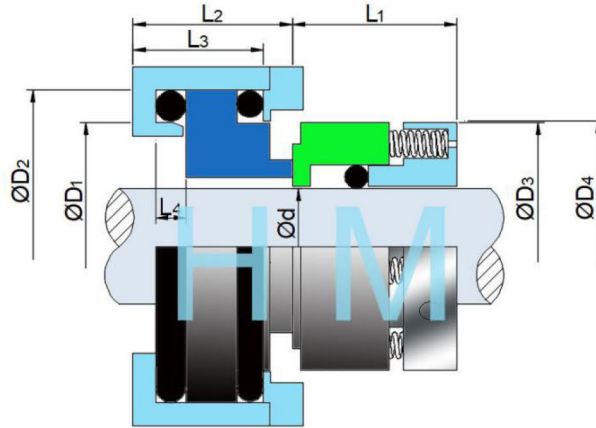

hengmi@meseal.com

d (mm)	D1	D2	D3	D4	L1	L2	L3	L4
20	39	49.2	40.0	40.5	22	23.0	18.0	4.0
22	44	54.2	42.0	44.5	22	23.0	18.0	4.0
24	46	56.2	44.0	46.5	22	23.0	18.0	4.0
25	47	57.2	47.0	47.5	24	23.0	18.0	4.0
28	50	60.2	50.0	50.5	24	23.0	18.0	4.0
30	52	62.2	52.0	52.5	24	25.0	20.0	4.0
32	54	64.2	54.0	54.5	24	25.0	20.0	4.0
33	55	65.2	55.0	55.5	24	25.0	20.0	4.0
35	57	67.2	57.0	57.5	29	26.0	20.0	4.0
38	63	73.2	65.0	65.5	29	26.0	20.0	4.0
40	65	75.2	67.0	67.5	29	26.0	20.0	4.0
42	67	77.2	69.0	69.5	29	26.0	20.0	4.0
43	68	78.2	70.0	70.5	29	26.0	20.0	4.0
45	70	80.2	72.0	72.5	29	26.0	20.0	4.0
48	73	83.2	75.0	75.5	29	25.5	18.4	3.2
50	76	88.2	77.0	77.5	29	25.5	18.4	3.2
53	79	91.2	80.0	80.5	29	25.5	18.4	3.2
55	81	93.2	82.0	82.5	29	25.5	18.4	3.2
58	84	96.2	85.0	85.5	29	25.5	18.4	3.2
60	86	98.2	87.0	87.5	29	25.5	18.4	3.2
63	89	101.2	80.0	90.5	29	25.5	18.4	3.2
65	91	103.2	92.0	92.5	29	25.5	18.4	3.2
68	94	107.2	95.0	95.5	29	25.5	18.4	3.2
70	96	108.2	97.0	97.5	29	25.5	18.4	3.2
75	101	113.2	102.0	102.5	29	25.5	18.4	3.2
80	111	123.2	112.5	113.0	31	25.5	18.4	3.2
85	116	128.2	117.5	118.0	31	25.5	18.4	3.2
90	121	133.2	122.5	123.0	31	25.5	18.4	3.2
95	126	138.2	127.5	128.0	31	25.5	18.4	3.2
100	131	143.2	132.5	133.0	31	25.5	18.4	3.2
105	136	148.2	137.5	138.0	31	25.5	18.4	3.2
110	141	153.2	142.5	143.0	31	25.5	18.4	3.2
115	155	175.2	156.0	156.6	55	31.0	26.0	5.0
120	160	180.2	161.0	161.6	55	31.0	26.0	5.0