


HM440




Type : Multi Spring Mechanical Seal
 Replacement : Chesterton 440
 Temperature : -20 to +180°C
 Pressure : ≤ 2.5 Mpa
 Speed : ≤ 15 m/s
 Material : Q1, Q2, U2, T, V, M1, F, G, M

HM440(Nose in)

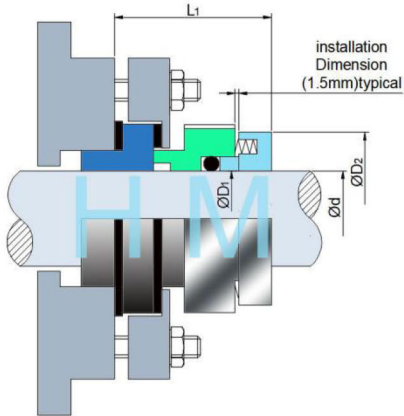

HM440(Nose out)

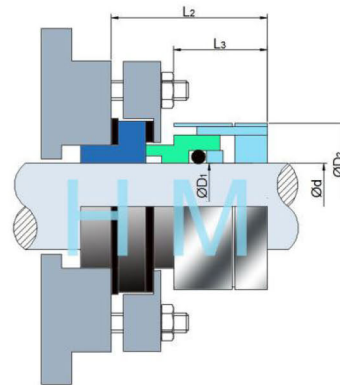

d (mm)	D1	D2	L1
24	317	49.2	49
25	318	50.0	49
28	320	54.0	49
30	321	57.2	49
32	322	57.2	49
35	324	60.3	49
38	325	63.5	49
40	326	66.7	49
42	326	69.9	49
45	327	69.9	49
48	328	73.0	49
50	329	76.2	49
55	331	79.4	49
60	332	85.7	49
65	334	92.1	49
70	335	98.0	62
75	337	104.4	62
80	338	108.2	62
85	340	113.8	62
90	342	118.1	62
95	343	123.4	62
100	345	128.3	62
110	348	139.2	62

d (mm)	D1	D2	L2	L3
24	317	49.2	55.5	38.0
25	318	50.0	55.5	38.0
28	320	54.0	55.5	38.0
30	321	57.2	55.5	38.0
32	322	57.2	55.5	38.0
35	324	60.3	55.5	38.0
38	325	63.5	55.5	38.0
40	326	66.7	55.5	38.0
42	326	69.9	55.5	38.0
45	327	69.9	55.5	38.0
48	328	73.0	55.5	38.0
50	329	76.2	55.5	38.0
55	331	79.4	55.5	38.0
60	332	85.7	55.5	38.0
65	334	92.1	55.5	38.0
70	335	98.0	68.5	41.5
75	337	104.4	68.5	41.5
80	338	108.2	68.5	41.5
85	340	113.8	68.5	41.5
90	342	118.1	68.5	41.5
95	343	123.4	68.5	41.5
100	345	128.3	68.5	41.5
110	348	139.2	68.5	41.5