



HMR33




hengmi@meseal.com

Type: Wave Spring Seal
 Replacement: Crane R33, Vulcan 1633, IIDERING LWS12
 Temperature: -15 to +200°C

Pressure: ≤1.0Mpa

Speed: ≤20m/s

Material: B, Q2, U2, P, E, N, V, F, G, Alfa

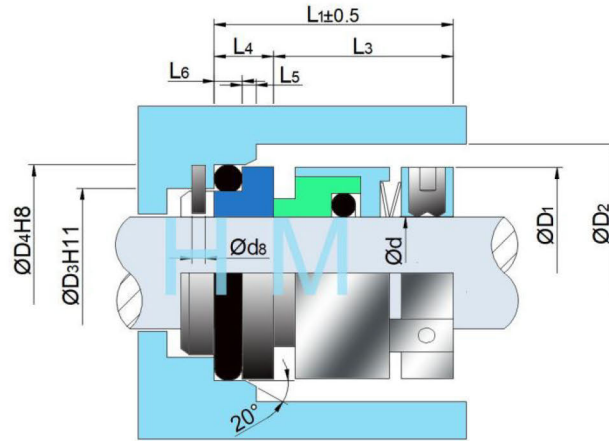

d (mm)	D1	D2	D3	D4	d8	L1	L2	L3	L4	L5	16
20	29	35	20.5	36	3	30.5	35	20.5	10.0	2.0	5
22	31	37	20.5	38	3	30.5	37	30.5	10.0	2.0	5
24	33	39	22.5	41	3	32.5	39	22.5	10.0	2.0	5
25	34	40	23.5	44	3	33.5	40	23.5	10.0	2.0	5
28	37	43	23.5	47	3	33.5	43	23.5	10.0	2.0	5
30	39	45	24.5	49	3	34.5	45	24.5	10.0	2.0	5
32	42	48	24.5	51	3	34.5	48	24.5	10.0	2.0	5
33	42	48	24.5	52	3	34.5	48	24.5	10.0	2.0	5
35	44	50	24.5	54	3	34.5	50	24.5	10.0	2.0	5
38	49	56	27.0	58	4	38.0	56	27.0	11.0	2.0	6
40	51	58	28.0	60	4	39.0	58	28.0	11.0	2.0	6
43	54	61	28.0	63	4	39.0	61	28.0	11.0	2.0	6
45	56	63	28.0	65	4	39.0	63	28.0	11.0	2.0	6
48	59	66	28.0	68	4	39.0	66	28.0	11.0	2.0	6
50	62	70	27.0	71	4	39.0	70	27.0	13.0	2.5	6
53	65	73	27.0	74	4	39.0	73	27.0	13.0	2.5	6
55	67	75	27.0	76	4	39.0	75	27.0	13.0	2.5	6
58	70	78	29.0	82	4	42.0	78	29.0	13.0	2.5	6
60	72	80	29.0	84	4	42.0	80	29.0	13.0	2.5	6
63	75	83	32.0	87	4	45.0	83	32.0	13.0	2.5	6
65	77	85	32.0	89	4	45.0	85	32.0	13.0	2.5	6
68	81	90	33.5	92	4	48.5	90	33.5	15.0	2.5	7
70	83	92	32.0	94	4	47.0	92	32.0	15.0	2.5	7
75	88	97	32.0	99	4	47.0	97	32.0	15.0	2.5	7
80	95	105	32.5	105	4	48.0	105	32.5	15.5	3.0	7
85	100	110	32.5	110	4	48.0	110	32.5	15.5	3.0	7
90	105	115	38.5	117	4	54.0	115	38.5	15.5	3.0	7
95	110	120	38.5	122	4	54.0	120	38.5	15.5	3.0	7
100	115	125	38.5	127	4	54.0	125	38.5	15.5	3.0	7