


HMCS-A50(DIN SAI)

Type: Internal Balanced
Mechanical Seal
Replacement: AES DIN SAI
Temperature: -40°C to +200
Pressure: ≤ 1 . 1Mpa
Speed: ≤ 15 m/s
Material: B,P,E,V,K,G,F,G

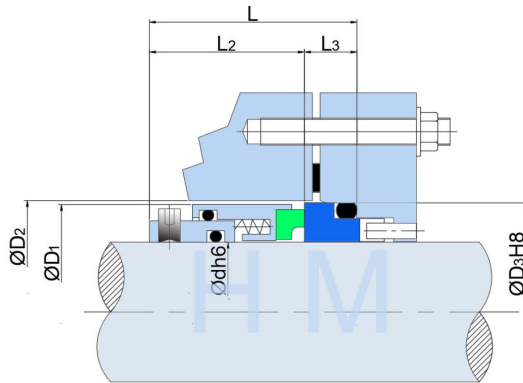

hengmi@mesel.com

d	D1 (Max	D2 (Min	D3	L1 (+/-0 .5	L2	L3
18	32	34	33	37.5	27.9	9.6
20	34	36	35	37.5	27.9	9.6
22	36	28	37	37.5	27.9	9.6
24	38	40	39	40.0	29.9	10.1
25	39	41	40	40.0	29.9	10.1
28	42	44	43	42.5	32.4	10.1
30	44	46	45	42.5	32.4	10.1
32	46	48	48	42.5	32.4	10.1
33	47	49	48	42.5	32.4	10.1
35	49	51	50	42.5	32.4	10.1
38	54	58	56	45.0	33.9	11.1
40	56	60	58	45.0	33.9	11.1
43	59	63	61	45.0	33.9	11.1
45	61	65	63	45.0	33.9	11.1
48	64	68	66	45.0	33.9	11.1
50	66	70	70	47.5	34.4	13.1
53	69	73	73	47.5	34.4	13.1
55	71	75	75	47.5	34.4	13.1
58	78	83	78	52.5	38.9	13.6
60	80	85	80	52.5	38.9	13.6
63	83	88	83	52.5	38.9	13.6
65	85	90	85	52.5	38.9	13.6
68	88	93	90	52.5	37.4	15.1
70	90	95	92	60.0	44.9	15.1
75	99	104	97	60.0	44.9	15.1
80	104	109	105	60.0	44.2	15.8
85	109	114	110	60.0	44.2	15.8
90	114	119	115	65.0	49.2	15.8
95	119	124	120	65.0	49.2	15.8
100	124	129	125	65.0	49.2	15.8