


# HMCS-A62(NCE)

Type: Non Chemical External seal  
 Replacement: AES NCE  
 Temperature: -40°C to +200°C  
 Pressure: 1.2Mpa  
 Speed: ≤18m/s  
 Material: B,P,E,V,K,G,F,G

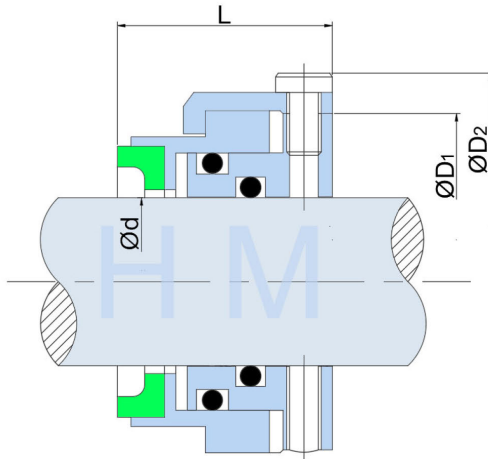

[hengmi@meseal.com](mailto:hengmi@meseal.com)

d (mm)	D1	D2	L		d (inch)	D1	D2	L
24	46.6	66.5	27.8		1.000	1.834	2.618	1.096
25	47.6	67.5	27.8		1.125	1.992	2.776	1.096
28	50.6	70.5	27.8		1.250	2.070	2.854	1.096
30	50.6	70.5	27.8		1.375	2.187	2.971	1.096
32	52.6	72.5	27.8		1.500	2.510	3.294	1.125
33	55.5	75.4	27.8		1.625	2.510	3.294	1.125
35	55.5	75.4	27.8		1.750	3.636	3.420	1.125
38	63.8	83.7	28.6		1.875	2.760	3.544	1.125
40	63.8	83.7	28.6		2.000	2.886	3.670	1.087
43	67.0	86.9	28.6		2.125	3.014	3.798	1.087
45	67.0	86.9	28.6		2.250	3.139	3.922	1.087
48	73.3	93.2	27.6		2.375	3.264	4.048	1.087
50	73.3	93.2	27.6		2.500	3.388	4.172	1.087
53	76.6	96.5	27.6		2.625	3.556	4.340	1.250
55	76.6	96.5	27.6		2.750	3.681	4.465	1.250
58	82.9	102.8	27.6		2.875	3.806	4.590	1.250
60	82.9	102.8	27.6		3.000	3.931	4.715	1.250
63	86.1	106.0	27.6		3.125	4.056	4.840	1.250
65	90.3	110.2	31.7		3.250	4.181	4.965	1.250
68	93.5	113.4	31.7		3.375	4.306	5.090	1.250
70	93.5	113.4	31.7		3.500	4.431	5.215	1.250
75	99.8	119.7	31.7		3.625	4.556	5.340	1.250
80	103.0	122.9	31.7		3.750	4.681	5.465	1.250
85	109.4	129.3	31.7		3.875	4.806	5.590	1.250
90	115.7	135.6	31.7		4.000	4.931	5.715	1.250
95	118.9	138.8	31.7					
100	125.2	145.1	31.7					