


HMCS-A57(CSSN)

Type: Single Cartridge Seal
 Replacement: AES CSSN
 Temperature: -30°C to +205°C
 Pressure: ≤ 2.1 Mpa
 Speed: ≤ 25 m/s
 Material: B,A,Q1,Q2,U2,E,V,K,F,G,M

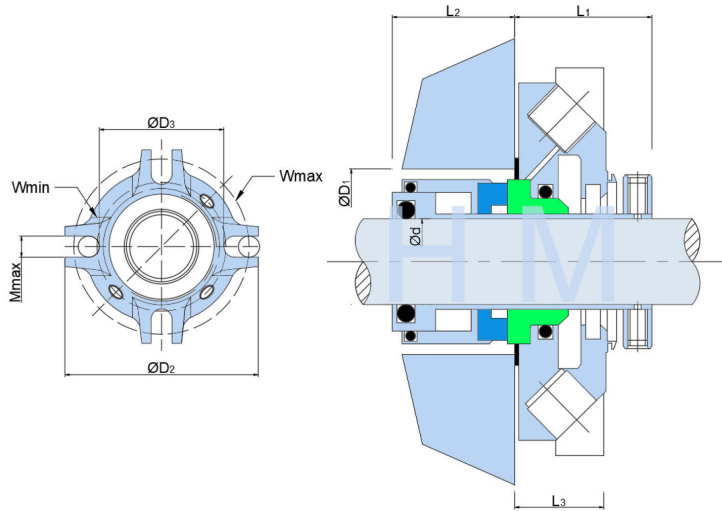

hengmi@mesel.com

d (mm)	D1			D2	D3	W		M max	L1	L2	L3
	min	mint	max			min	max				
24	40.0	41.0	46.0	104.8	60.3	74.6	92.0	12	37.3	30.7	23.5
25	41.0	42.0	49.2	104.8	60.3	74.6	92.0	12	37.3	30.7	23.5
28	44.0	45.0	52.4	108.0	60.3	74.6	95.3	12	37.3	30.7	23.5
30	46.0	47.0	55.6	111.0	63.5	77.8	98.4	12	37.3	30.7	23.5
32	48.0	49.0	55.6	111.0	63.5	77.8	98.4	12	37.3	30.7	23.5
33	49.0	50.0	55.6	111.0	63.5	77.8	98.4	12	37.3	30.7	23.5
35	50.8	51.8	58.7	111.0	66.7	80.9	98.4	12	37.3	30.7	23.5
38	57.2	58.2	63.5	127.0	71.9	85.7	114.3	12	35.6	27.7	21.6
40	57.2	58.2	63.5	127.0	71.9	85.7	114.3	12	35.6	27.7	21.6
43	60.3	61.3	63.5	127.0	71.9	85.7	114.3	12	35.6	27.7	21.6
45	63.5	64.5	69.8	133.4	76.7	90.5	120.7	12	35.6	27.7	21.6
48	66.7	67.7	69.8	133.4	76.7	90.5	120.7	12	35.6	27.7	21.6
50	68.0	69.0	69.8	133.4	76.7	90.5	120.7	12	35.6	27.7	21.6
53	71.0	72.0	76.2	139.7	86.0	100.0	127	12	35.9	29.2	21.6
55	73.0	74.0	84.1	146.0	93.7	111.1	130.2	12	35.9	29.2	21.6
58	76.2	77.2	84.1	146.0	93.7	111.1	130.2	16	35.9	29.2	21.6
60	79.4	80.4	90.5	152.4	100	117.5	136.5	16	35.9	29.2	21.6
63	85.7	87.2	98.4	177.8	109.5	127.0	161.9	16	38.1	31.8	23.5
65	88.9	90.4	98.4	177.8	109.5	127.0	161.9	16	38.1	31.8	23.5
70	92.1	93.6	98.4	177.8	109.5	127.0	161.9	16	38.1	31.8	23.5
75	98.5	100.0	114.3	190.5	125.4	142.9	173.0	16	38.1	31.8	23.5
80	101.6	103.1	114.3	190.5	125.4	142.9	173.0	16	38.1	31.8	23.5
85	108.0	109.5	123.7	203.2	135.0	152.4	185.7	16	38.1	31.8	23.5