


HMCS-A59(CDPN)

Type: Double Cartridge Seal
 Replacement: AES CDPN
 Temperature: -30°C to +205°C
 Pressure: ≤ 2.1 Mpa
 Speed: ≤ 25 m/s
 Material: B,A,Q1,Q2,U2,E,V,K,F,G,M

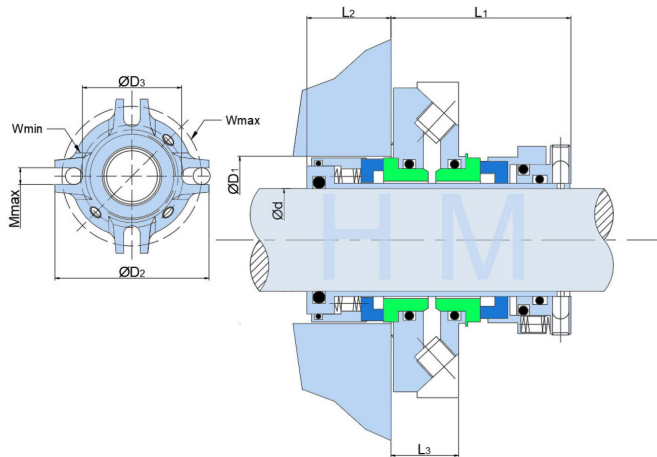

hengmi@mesal.com

d	D1			D2	D3	W		M	L1	L2	L3
	min	mint	max			min	max				
24	40.0	41.0	46.0	104.8	60.3	74.6	92.0	12	51.3	30.7	23.5
25	41.0	42.0	49.2	104.8	60.3	74.6	92.0	12	51.3	30.7	23.5
28	44.0	45.0	52.4	108.0	60.3	74.6	95.3	12	51.3	30.7	23.5
30	46.0	47.0	55.6	111.0	63.5	77.8	98.4	12	51.3	30.7	23.5
32	48.0	49.0	55.6	111.0	63.5	77.8	98.4	12	51.3	30.7	23.5
33	49.0	50.0	55.6	111.0	63.5	77.8	98.4	12	51.3	30.7	23.5
35	50.8	51.8	58.7	111.0	66.7	80.9	98.4	12	51.3	30.7	23.5
38	57.2	58.2	63.5	127.0	71.9	85.7	114.3	12	56.5	27.7	21.6
40	57.2	58.2	63.5	127.0	71.9	85.7	114.3	12	56.5	27.7	21.6
43	60.3	61.3	63.5	127.0	71.9	85.7	114.3	12	56.5	27.7	21.6
45	63.5	64.5	69.8	133.4	76.7	90.5	120.7	12	56.5	27.7	21.6
48	66.7	67.7	69.8	133.4	76.7	90.5	120.7	12	56.5	27.7	21.6
50	68.0	69.0	69.8	133.4	76.7	90.5	120.7	12	56.5	27.7	21.6
53	71.0	72.0	76.2	139.7	86.0	100.0	127.0	12	57.2	29.2	21.6
55	73.0	74.0	84.1	146.0	93.7	111.1	130.2	12	57.2	29.2	21.6
58	76.2	77.2	84.1	146.0	93.7	111.1	130.2	16	57.2	29.2	21.6
60	79.4	80.4	90.5	152.4	100.0	117.5	136.5	16	57.2	29.2	21.6
63	85.7	87.2	98.4	177.8	109.5	127.0	161.9	16	63.8	31.8	23.5
65	88.9	90.4	98.4	177.8	109.5	127.0	161.9	16	63.8	31.8	23.5
70	92.1	93.6	98.4	177.8	109.5	127.0	161.9	16	63.8	31.8	23.5
75	98.5	100.0	114.3	190.5	125.4	142.9	173.0	16	63.8	31.8	23.5
80	101.6	103.1	114.3	190.5	125.4	142.9	173.0	16	63.8	31.8	23.5
85	108.0	109.5	123.7	203.2	135.0	152.4	185.7	16	63.8	31.8	23.5

HMCS-A59(CDPN)

d	D1			D2	D3	W		M	L1	L2	L3
	min	mint	max			min	max				
1.000	1.625	1.665	1.937	4.125	2.375	2.937	3.625	1/2	2.020	1.209	0.927
1.125	1.750	1.790	2.062	4.25	2.375	2.937	3.750	1/2	2.020	1.209	0.927
1.250	1.875	1.915	2.187	4.375	2.500	3.062	3.875	1/2	2.020	1.209	0.927
1.375	2.000	2.040	2.312	4.375	2.625	3.186	3.875	1/2	2.020	1.209	0.927
1.500	2.250	2.290	2.500	5.000	2.832	3.375	4.500	1/2	2.226	1.090	0.852
1.625	2.375	2.415	2.500	5.000	2.832	3.375	4.500	1/2	2.226	1.090	0.852
1.750	2.500	2.540	2.750	5.250	3.022	3.562	4.750	1/2	2.226	1.090	0.852
1.875	2.625	2.665	2.750	5.250	3.022	3.562	4.750	1/2	2.226	1.090	0.852
2.000	2.750	2.790	3.000	5.500	3.386	3.937	5.000	1/2	2.250	1.150	0.852
2.125	2.875	2.915	3.312	5.750	3.687	4.375	5.125	5/8	2.250	1.150	0.852
2.250	3.000	3.040	3.312	5.750	3.687	4.375	5.125	5/8	2.250	1.150	0.852
2.375	3.125	3.165	3.562	6.000	3.937	4.625	5.375	5/8	2.250	1.150	0.852
2.500	3.375	3.435	3.875	7.000	4.312	5.000	6.375	5/8	2.510	1.250	0.926
2.625	3.500	3.560	3.875	7.000	4.312	5.000	6.375	5/8	2.510	1.250	0.926
2.750	3.625	3.685	3.875	7.000	4.312	5.000	6.375	5/8	2.510	1.250	0.926
2.875	3.750	3.810	4.500	7.500	4.937	5.625	6.812	5/8	2.510	1.250	0.926
3.000	3.875	3.935	4.500	7.500	4.937	5.625	6.812	5/8	2.510	1.250	0.926
3.125	4.000	4.060	4.500	7.500	4.937	5.625	6.812	5/8	2.510	1.250	0.926
3.250	4.125	4.185	4.875	8.000	5.312	6.000	7.312	5/8	2.510	1.250	0.926
3.375	4.250	4.310	4.875	8.000	5.312	6.000	7.312	5/8	2.510	1.250	0.926
3.500	4.375	4.435	4.875	8.000	5.312	6.000	7.312	5/8	2.510	1.250	0.926

