


HMCS-A63(DISP)

Type: Double Cartridge Seal
 Replacement: AES DISP
 Temperature: -30°C to +205°C
 Pressure: $\leq 2.1\text{Mpa}$
 Speed: $\leq 25\text{m/s}$
 Material: B,A,Q1,Q2,U2,E,V,K,F,G,M

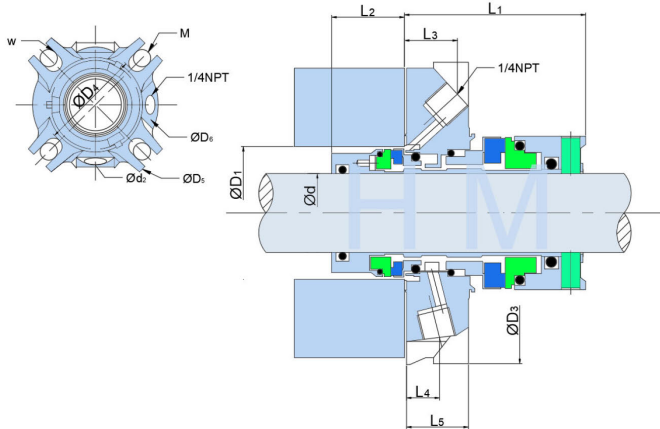

hengmi@meseal.com

d	d2 (NPT)	D1		D3	D4	D5	D6	W		M max	L1	L2	L3	L4	L5	O
		min	max					min	max							
24	1/4	41.0	48.6	71.4	57.2	104.8	79.1	71.2	92.8	12	52.6	28.2	17.9	15.0	23.8	10
25	1/4	41.0	48.6	71.4	57.2	104.8	79.1	71.2	92.8	12	52.6	28.2	17.9	15.0	23.8	10
28	1/4	44.0	52.6	76.2	60.4	108.0	82.6	74.3	96.0	12	52.6	28.2	17.0	14.1	23.8	10
30	1/4	46.0	54.7	78.0	63.5	111.1	84.1	77.5	99.0	12	52.6	28.2	17.8	13.0	23.8	10
32	1/4	48.0	54.7	78.5	63.5	111.1	84.1	77.5	99.0	12	52.6	28.2	17.8	13.0	23.8	10
33	1/4	49.0	54.7	78.5	63.5	111.1	84.1	77.5	99.0	12	52.6	28.2	17.8	13.0	23.8	10
33K	1/4	49.0	54.7	82.5	63.5	98.5	97.0	77.5	86.5	12	53.3	27.7	13.7	13.7	21.7	15
35	1/4	51.0	58.6	78.5	66.7	111.1	83.8	80.7	99.0	12	52.6	28.2	17.6	13.0	23.8	10
38	1/4	58.0	63.6	85.7	72.0	127.0	92.1	85.9	115.0	12	53.3	28.0	16.2	12.7	21.7	10
40	1/4	60.0	64.7	85.7	72.0	127.0	92.1	85.9	115.0	12	53.3	28.0	16.2	12.7	21.7	10
43	1/4	63.0	68.6	89.7	76.8	133.4	94.9	90.8	121.3	12	53.3	28.0	16.1	13.0	21.7	10
43K	1/4	63.0	71.7	93.5	81.0	119.7	101.6	95.0	107.6	12	53.3	28.0	18.9	22.9	17.1	45
45	1/4	65.0	70.2	88.9	76.8	133.4	95.3	90.8	121.4	12	53.3	28.0	16.1	12.7	21.7	10
48	1/4	67.0	70.2	88.9	76.8	133.4	95.3	90.8	121.4	12	53.3	28.0	16.2	12.7	21.7	10
50	1/4	70.0	77.7	95.3	86.0	139.7	101.6	100.0	127.7	12	53.3	28.0	16.2	12.7	21.7	10
53	1/4	73.0	84.7	101.3	93.6	146.1	108.0	111.1	130.0	16	53.3	28.0	16.2	13.4	21.7	10
55	1/4	75.0	84.7	101.3	93.6	146.1	108.0	111.1	130.0	16	53.3	28.0	16.2	13.4	21.7	10
58	1/4	78.0	84.7	111.3	93.6	146.1	108.0	111.1	130.0	16	53.3	28.0	16.2	13.4	21.7	10
60	1/4	80.0	89.6	104.4	100.0	152.4	114.3	117.5	136.4	16	53.3	28.0	16.2	13.7	21.7	10
63	3/8	82.6	98.6	121.2	109.5	177.8	126.8	127.0	161.8	16	53.9	27.4	18.8	13.5	23.9	10
65	3/8	85.7	98.7	121.2	109.5	177.8	126.8	127.0	161.8	16	53.9	27.4	18.8	13.5	23.9	10
70	3/8	90.0	98.7	121.2	109.5	177.8	126.8	127.0	161.8	16	53.9	27.4	18.8	13.5	23.9	10
75	3/8	98.4	113.5	130.6	125.4	190.5	137.2	142.9	14.5	16	60.2	33.0	18.5	13.8	23.9	10
80	3/8	101.6	113.5	130.6	125.4	190.5	138.1	142.9	174.5	16	60.2	33.0	18.0	13.8	23.9	10
85	3/8	108.0	121.5	140.2	135.0	203.2	146.0	156.0	185.0	20	60.2	33.0	18.9	13.4	23.9	10