
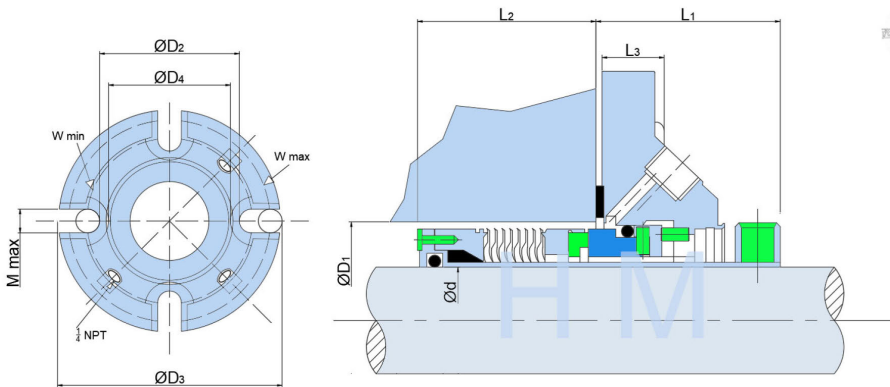


HMMB-A50(BQFD)

Type: Metal Bellow Seal
 Replacement: AES BQFD
 Temperature: -40°C to +204°C
 Pressure: ≤ 2.0 Mpa
 Speed: ≤ 20 m/s
 Material: A,B,Q1,Q2,U1,U2,T,Graphite,V,G,F,M,T6



hengmi@mesel.com

d (mm)	D3	D2	D4	L3	D1 (min)	D1 (max)	W (min)	W (max)	M (max)	L2	L1
24	104.8	54.0	49.2	13.2	41.0	49.0	67.0	90.5	12	38.9	40.5
25	104.8	54.0	49.2	13.2	41.0	49.0	67.0	90.5	12	38.9	40.5
28	108.0	57.2	52.4	13.2	44.0	52.3	70.3	93.6	12	38.9	40.5
30	111.0	60.4	55.6	13.2	46.0	55.5	73.5	96.8	12	38.9	40.5
32	111.0	60.4	55.6	13.2	48.0	55.5	73.5	96.8	12	38.9	40.5
33	111.0	60.4	55.6	13.2	49.0	55.5	73.5	96.8	12	38.9	40.5
35	111.0	63.5	58.8	13.2	51.0	57.5	76.6	96.8	12	38.9	40.5
38	127.0	71.5	65.0	16.4	57.2	60.4	85.7	114.3	12	42.9	44.5
40	127.0	71.5	65.0	16.4	58.0	60.4	85.7	114.3	12	42.9	44.5
43	139.7	81.0	71.4	16.4	61.0	69.9	95.3	127.0	12	42.9	44.5
45	139.7	81.0	71.4	16.4	63.5	69.9	95.3	127.0	12	42.9	44.5
48	139.7	81.0	71.4	16.4	66.7	73.0	95.3	127.0	12	42.9	44.5
50	152.4	90.5	77.8	16.4	68.0	76.2	104.8	139.7	12	44.5	44.5
53	152.4	90.5	77.8	16.4	71.0	76.2	104.8	139.7	12	44.5	44.5
55	165.1	96.8	84.1	16.4	74.0	82.5	114.3	149.2	16	44.5	44.5
58	165.1	96.8	84.1	16.4	76.2	82.6	114.3	149.2	16	44.5	44.5
60	165.1	96.8	84.1	16.4	79.4	85.7	114.3	149.2	16	44.5	44.5
63	177.8	109.5	96.8	19.6	85.8	92.1	127.0	160.3	16	51.6	47.7
65	177.8	109.5	96.8	19.6	88.9	95.3	127.0	160.3	16	51.6	47.7
68	177.8	109.5	96.8	19.6	92.1	98.4	127.0	160.3	16	51.6	47.7
70	177.8	109.5	96.8	19.6	92.1	98.4	127.0	160.3	16	54.6	47.7
75	190.5	125.4	108.0	19.6	98.5	108.0	142.9	173.0	16	54.6	47.7
80	190.5	125.4	108.0	19.6	101.6	111.1	142.9	173.0	16	54.6	47.7
85	203.2	135.0	117.5	19.6	108.0	117.5	155.6	182.5	20	54.6	47.7
90	215.9	150.8	127.0	19.6	114.3	127.0	171.5	195.2	20	54.6	47.7
95	215.9	150.8	127.0	19.6	117.5	130.2	171.5	195.2	20	54.6	47.7
100	228.6	168.3	136.0	19.6	123.9	139.7	188.9	207.9	20	54.6	47.7