


HMMB-A52(BDTP)

Type : Metal Bellow Seal
 Replacement: AES BDTP
 Temperature: -30°C to +204°C
 Pressure : ≤2.0Mpa Speed :
 Material: ≤20m/s
 A,B,Q1,Q2,U1,U2,T,Graphite,V,G,F,M,T6

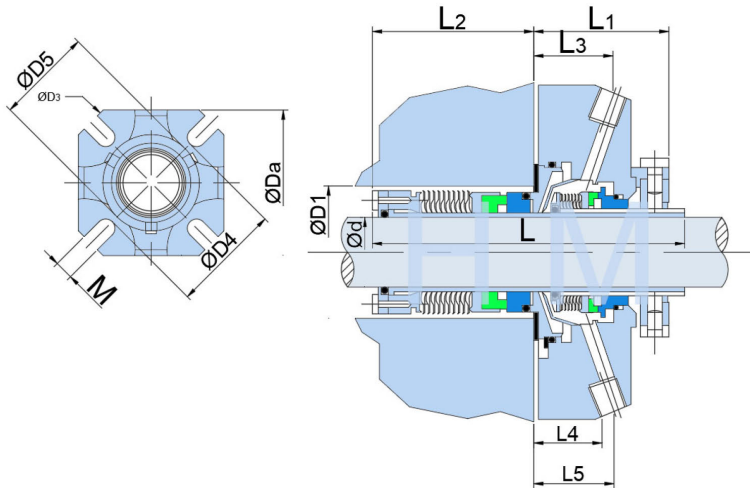

hengmi@meseal.com

d(mm)	D1 (min)	D1 (max)	D3	D4	D5	L	L1	L2	L3	L4	L5	M
28	44.0	52.0	111.1	62.2	57.2	100.8	52.4	48.4	28.6	19.1	20.6	14.0
35	51.0	60.3	104.1	71.8	67.0	100.8	52.4	48.4	28.6	19.1	20.6	11.0
45	63.5	73.0	139.1	83.8	75.7	106.7	53.1	53.6	33.0	19.1	31.5	14.0
55	74.0	90.5	150.0	100.3	86.6	108.7	53.1	55.6	29.0	22.2	25.3	17.5
60	79.4	95.0	170.8	108.7	94.4	108.7	53.1	55.6	29.7	19.1	26.5	17.5
63	85.8	95.0	170.8	108.7	94.4	114.9	53.1	61.8	33.0	19.1	31.5	17.5
65	88.9	98.0	180.3	111.9	98.3	114.9	53.1	61.8	33.0	19.1	31.5	17.5

d (inch)	D1(min)	D1(max)	D3	D4	D5	L	L1	L2	L3	L4	L5	M
1.125	1.750	2.062	4.375	2.449	2.250	3.970	2.062	1.908	1.125	0.750	0.812	0.551
1.375	2.000	2.375	4.100	2.827	2.638	3.970	2.062	1.908	1.125	0.750	0.812	0.433
1.750	2.500	2.875	5.475	3.297	2.982	4.200	2.091	2.109	1.299	0.750	1.240	0.551
1.875	2.625	3.000	5.906	3.450	3.108	4.200	2.091	2.109	1.299	0.750	1.240	0.689
1.875-D	2.625	2.875	4.875	3.325	3.025	4.200	2.091	2.109	1.150	0.800	1.15	0.472
2.125	2.875	3.562	5.906	3.950	3.408	4.280	2.091	2.109	1.140	0.875	0.995	0.689
2.375	3.125	3.750	6.725	4.280	3.718	4.280	2.091	2.109	1.170	0.750	1.043	0.689
2.500	3.375	3.750	6.725	4.280	3.718	4.525	2.091	2.437	1.299	0.750	1.240	0.689
2.625	3.500	3.875	7.100	4.405	3.871	4.525	2.091	2.437	1.299	0.750	1.240	0.689