


HMMB-AP01(WB400/450/500)

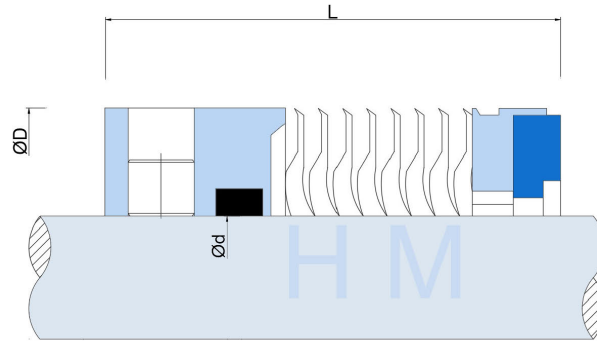

Type: Welded Bellow Component
 Replacement: APEX WB400/450/500
 Temperature: -50°C to $+400^{\circ}\text{C}$
 Pressure: ≤ 25 Bar
 Speed: $\leq 10\text{m/s}$
 Material : Q1,Q2,U2,T,V,M1,F,G,M

WB400: Retainer: SS316, Core: Hastelloy C, Hub: SS316.

WB450: Retainer: SS316, Core: AM350, Hub: SS316.

WB500: Retainer: Hastelloy C, Core: Hastelloy C, Hub: Hastelloy C

d (inch)	D	L
0.750	1.312	1.250
0.875	1.437	1.250
0.937	1.500	1.250
1.000	1.457	1.250
1.125	1.687	1.250
1.250	1.812	1.312
1.250X	1.694	1.312
1.375	1.937	1.437
1.500	2.062	1.437
1.500X	1.944	1.437
1.625	2.187	1.437
1.750	2.312	1.437
1.875	2.437	1.500
2.000	2.562	1.500
2.125	2.687	1.500
2.250	2.812	1.562
2.375	2.937	1.562
2.500	3.187	1.562
2.625	3.312	1.625
2.750	3.437	1.625
2.875	3.625	1.687
3.000	3.750	1.687
3.125	3.875	1.750
3.250	4.000	1.750
3.375	4.125	1.750
3.500	4.250	1.875
3.625	4.375	1.875
3.750	4.500	1.875
3.875	4.625	1.875
4.000	4.750	1.875