

HMMB-B01(MFL65)




Type: Metal Bellow Seal
Replacement: Burgmann MFL65
Temperature: -20°C to +400°C

Pressure : ≤ 2.1 Mpa

Speed : ≤ 50 m/s

Material : Q1,S,A,Q2,V,E,P,M5,M6,G1,T4,M

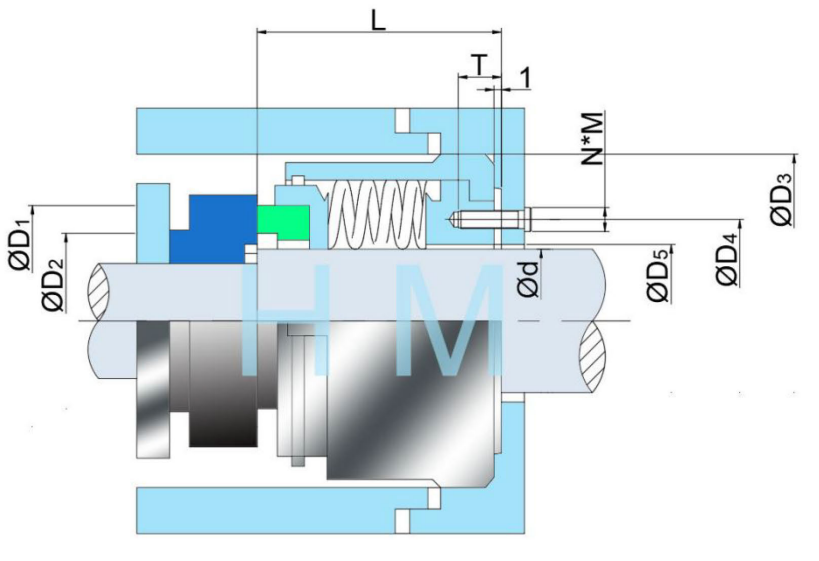

hengmi@mesel.com

Nom.	d	D1	D2	D 3	D4	D5	L	N x M	T
19	16-19	30.3	25.3	45.0	29	20.5	33.5	4xM4	6
24	20-24	38.8	33.8	49.0	35	25.5	33.5	4xM4	6
30	25-30	43.6	38.6	55.0	40	31.5	34.5	6xM4	6
35	31-35	45.8	40.8	59.0	45	36.0	33.0	6xM4	6
40	36-40	51.5	46.5	65.0	50	41.0	30.5	6xM4	6
45	41-45	55.2	50.2	69.0	55	46.0	35.5	6xM4	6
51	46-51	64.7	59.7	76.5	63	52.0	40.5	6xM5	7
60	52-60	70.6	65.6	84.0	70	61.0	32.0	6xM5	7
70	61-70	82.8	76.8	95.0	80	71.0	38.0	6xM5	7
82	71-82	98.0	92.0	112.0	95	83.5	41.0	6xM6	7
88	83-88	107.7	101.7	120.0	100	89.5	47.0	6xM6	7
100	89- 100	112.7	106.7	130.0	112	101.0	47.0	6xM6	7