


# HMMB-B05(MFLCT80)

Type: Metal Bellow Seal  
 Replacement: Burgmann MFLCT80  
 Temperature: - 100°C to +100°C  
 Pressure:  $\leq 2.5$  Mpa  
 Speed:  $\leq 10$  m/s  
 Material: A, Q2, Graphite, M5, M6, F, G, M

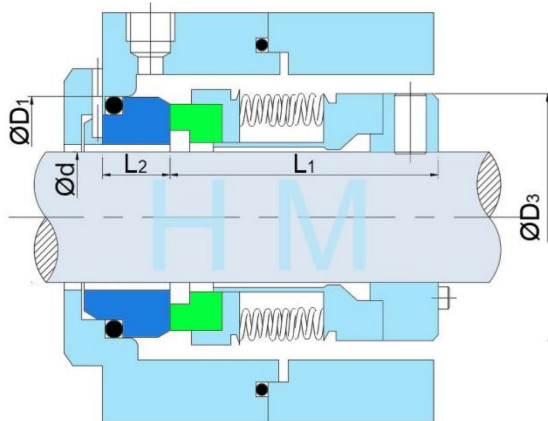

[hengmi@meseal.com](mailto:hengmi@meseal.com)

d	D3	D1	L1	L2
16	38	35	46.5	11.5
18	40	37	46.5	11.5
20	42	40	46.5	11.5
22	44	43	46.5	11.5
24	46	43	46.5	11.5
25	47	45	46.5	11.5
28	50	48	46.5	11.5
30	52	50	46.5	11.5
32	54	56	46.5	14
33	55	56	46.5	14
35	57	58	46.5	14
38	60	61	46.5	14
40	66	63	47.5	14
43	69	66	47.5	14
45	71	70	47.5	15
48	74	73	47.5	15
50	76	75	47.5	15
53	79	78	47.5	15
55	81	80	47.5	15
58	85	83	53	15
60	87	85	53	15
63	90	90	53	18
65	92	92	53	18
68	95	97	53	18
70	97	97	53	18
75	102	105	52.8	18.2
80	107	110	52.8	18.2
85	112	115	52.8	18.2
90	117	120	53.8	17.2
95	122	125	53.8	17.2
100	127	134.3	54	20