




HM-N11B(MF95N)

Type: Metal Bellow Seal
 Replacement: Bergmann MF95N
 Temperature: -40°C to +220°C
 Pressure: ≤1.6Mpa
 Speed: ≤20m/s
 Material: B,A1,Q1,Q2,U2,P,E,N,V,F,G

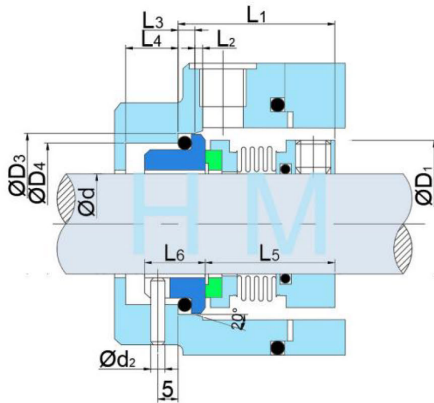

hengmi@meseal.com

d (mm)	D1	D3	D4	d 2	L1	L2	L3	L4	L5	L6
14	24	25	21	3	35.0	1.5	4	8.5	30.5	15.0
16	26	27	23	3	35.0	1.5	4	8.5	29.5	15.0
18	32	33	27	3	37.5	2.0	5	9.0	30.5	15.0
20	34	35	29	3	37.5	2.0	5	9.0	30.5	15.0
22	36	37	31	3	37.5	2.0	5	9.0	30.5	15.0
24	39	39	33	3	40.0	2.0	5	9.0	33.0	15.0
25	39	40	34	3	40.0	2.0	5	9.0	33.0	15.0
28	42	43	37	3	42.5	2.0	5	9.0	35.5	15.0
30	44	45	39	3	42.5	2.0	5	9.0	35.5	15.0
32	46	48	42	3	42.5	2.0	5	9.0	35.5	15.0
33	47	48	42	3	42.5	2.0	5	9.0	35.5	15.0
35	49	50	44	3	42.5	2.0	5	9.0	35.5	15.0
38	54	56	49	3	45.0	2.0	6	9.0	37.0	16.0
40	56	58	51	4	45.0	2.0	6	9.0	37.0	16.0
43	59	61	54	4	45.0	2.0	6	9.0	37.0	16.0
45	61	63	56	4	45.0	2.0	6	9.0	37.0	16.0
48	64	66	59	4	45.0	2.0	6	9.0	37.0	16.0
50	66	70	62	4	47.5	2.5	6	9.0	38.0	17.0
53	69	73	65	4	47.5	2.5	6	9.0	38.0	17.0
55	71	75	67	4	47.5	2.5	6	9.0	38.0	17.0
58	78	78	70	4	52.5	2.5	6	9.0	42.0	18.0
60	80	80	72	4	52.5	2.5	6	9.0	42.0	18.0
63	83	83	75	4	52.5	2.5	6	9.0	42.0	18.0
65	85	85	77	4	52.5	2.5	6	9.0	42.0	18.0
68	87	90	81	4	52.5	2.5	7	9.0	41.5	18.5
70	90	92	83	4	60.0	2.5	7	9.0	48.5	19.0
75	99	97	88	4	60.0	2.5	7	9.0	48.5	19.0
80	104	105	95	4	60.0	3.0	7	9.0	48.5	19.0
85	109	110	100	4	60.0	3.0	7	9.0	48.5	19.0
90	114	115	105	4	65.0	3.0	7	9.0	52.0	20.5
95	119	120	110	4	65.0	3.0	7	9.0	52.0	20.5
100	124	125	115	4	65.0	3.0	7	9.0	52.0	20.5