


# HMMB-J34(515E)

Type: Asymmetric Formed Metal Bellow Seal  
 Replacement: Crane 515E  
 Temperature: -40 to +200°C  
 Pressure:  $\leq 2.5$  Mpa  
 Speed:  $\leq 25$  m/s  
 Material: Q1, Q2, U2, T, V, M1, F, G, M

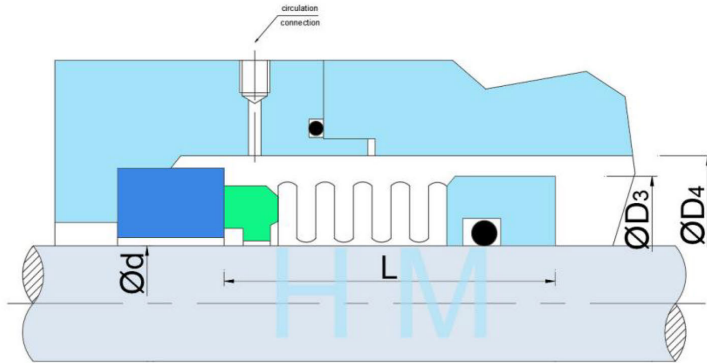

[hengmi@mesel.com](mailto:hengmi@mesel.com)

Size (mm)	d	D3	D4	L
18	18	31.0	34	31.5
20	20	31.0	36	31.5
22	22	31.0	38	31.5
24	24	36.0	40	36.7
25	25	36.0	41	37.0
28	28	39.0	44	37.5
30	30	42.0	46	38.0
32	32	46.0	48	43.0
33	33	46.0	49	43.0
35	35	48.5	51	43.0
38	38	51.5	58	42.0
40	40	54.0	60	42.0
43	43	58.4	63	47.0
45	45	58.4	65	47.0
48	48	63.7	68	47.0
50	50	63.7	70	46.5
53	53	69.0	73	56.5
55	55	71.0	75	56.5
58	58	73.3	83	56.5
60	60	76.7	85	56.5
63	63	79.4	88	56.5
65	65	83.0	90	66.5
68	68	87.8	93	66.5
70	70	87.8	95	65.5
75	75	94.0	104	65.5
80	80	100.6	109	75.0
85	85	106.0	114	75.0
90	90	110.3	119	75.0
95	95	114.9	124	75.0
100	100	121.3	129	75.0