


# HMMB-J25(613)

Type: Metal Bellow Seal  
 Replacement: Crane 613  
 Temperature: -75°C to +200°C  
 Pressure:  $\leq 2.5$  Mpa  
 Speed:  $\leq 10$  m/s  
 Material: A, Q1, Q2, Graphite, F, G, M, M5

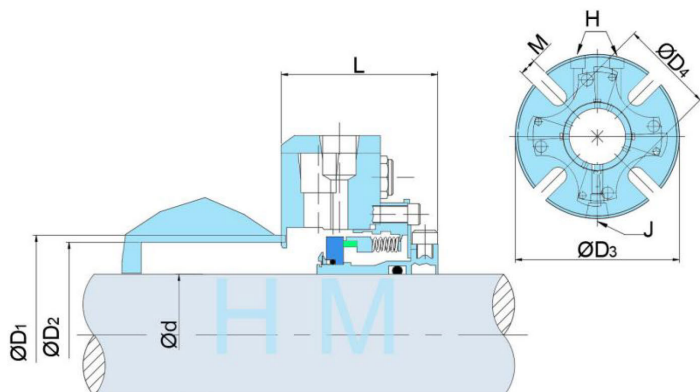

[hengmi@meseal.com](mailto:hengmi@meseal.com)

d (mm)	D1	D2	D3	D4	L	M	H	J
33	60.33	53.98	117.48	71.45	52.43	12.70	2001-4- 18	2003-8- 18
35	60.33	53.98	117.48	71.45	52.43	12.70	2001-4- 18	2003-8- 18
43	76.19	66.68	119.35	85.73	53.98	14.27	2003-8- 18	2003-8- 18
45	76.19	66.68	119.35	85.73	53.98	14.27	2003-8- 18	2003-8- 18
53	95.00	83.00	152.40	100.03	61.90	14.27	2003-8- 18	2003-8- 18
55	95.00	83.00	152.40	100.03	61.90	14.27	2003-8- 18	2003-8- 18
65	107.95	92.08	171.45	122.25	70.64	17.45	2003-8- 18	2003-8- 18

d (inch)	D1	D2	D3	D4	L	M	H	J
1.125	2.250	2.000	4.625	2.44	2.00	0.44	2001-4- 18	2003-8- 18
1.375	2.375	2.125	4.625	2.81	2.06	0.50	2001-4- 18	2003-8- 18
1.375*	3.312	2.875	5.25	3.44	2.06	0.44	2001-4- 18	2003-8- 18
1.750	3.000	2.625	5.50	3.38	2.13	0.56	2003-8- 18	2003-8- 18
1.750*	3.937	3.500	6.75	4.44	2.13	0.69	2003-8- 18	2003-8- 18
1.875	3.125	2.750	5.50	3.31	2.19	0.56	2003-8- 18	2003-8- 18
1.875*	4.125	3.625	6.00	4.44	2.56	0.56	2003-8- 18	2003-8- 18
2.125	3.437	3.062	6.00	3.94	2.44	0.56	2003-8- 18	2003-8- 18
2.125*	4.437	4.000	7.25	4.75	2.44	0.75	2003-8- 18	2003-8- 18
2.500	4.000	3.500	6.75	4.25	2.63	0.75	2003-8- 18	2003-8- 18
2.500*	5.250	4.750	8.00	5.56	2.63	0.69	2003-8- 18	2003-8- 18
2.625	4.250	3.625	6.75	4.81	2.78	0.69	2003-8- 18	2003-8- 18
2.625*	5.125	4.625	7.375	5.31	2.78	0.69	2003-8- 18	2003-8- 18