


HMMB-J24(606)

Type: Metal Bellow Seal
 Replacement: Crane 606
 Temperature: -20°C to +425°C
 Pressure: ≤ 2.5 Mpa
 Speed: ≤ 20 m/s
 Material: A, Q1, Q2, U2, Graphite, F, G, M, T6

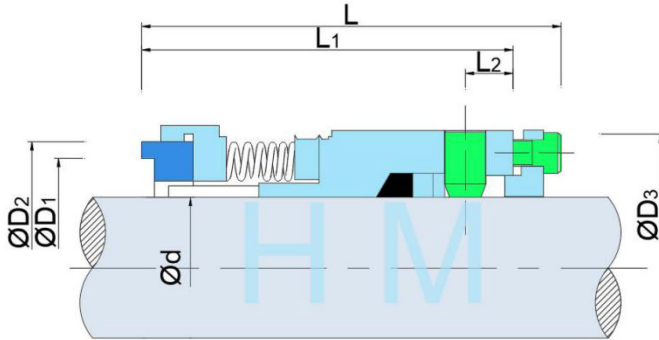

hengmi@mesel.com

| Dash No. | d (inch) | D1 | D2 | D3 | L | L1 | L2 |
|----------|-------------|-------|-------|-------|-------|-------|-------|
| 16 | 0.750 | 1.238 | 1.438 | 1.625 | 2.312 | 1.687 | 0.188 |
| 18 | 0.875 | 1.365 | 1.565 | 1.750 | 2.343 | 1.719 | 0.188 |
| 20 | 1.000 | 1.519 | 1.719 | 1.875 | 2.343 | 1.719 | 0.188 |
| 22 | 1.125 | 1.645 | 1.845 | 2.000 | 2.375 | 1.750 | 0.188 |
| 24 | 1.250 | 1.720 | 1.970 | 2.125 | 2.375 | 1.750 | 0.188 |
| 26 | 1.375 | 1.845 | 2.095 | 2.250 | 2.468 | 1.844 | 0.250 |
| 28 | 1.500 | 1.970 | 2.220 | 2.375 | 2.500 | 1.875 | 0.250 |
| 30 | 1.625 | 2.095 | 2.345 | 2.500 | 2.500 | 1.875 | 0.250 |
| 32 | 1.750 | 2.221 | 2.471 | 2.625 | 2.531 | 1.906 | 0.250 |
| 34 | 1.875 | 2.345 | 2.596 | 2.750 | 2.531 | 1.906 | 0.250 |
| 36 | 2.000 | 2.471 | 2.721 | 2.875 | 2.562 | 1.937 | 0.250 |
| 38 | 2.125 | 2.596 | 2.846 | 3.000 | 2.562 | 1.937 | 0.250 |
| 40 | 2.250 | 2.796 | 3.096 | 3.250 | 2.750 | 2.000 | 0.250 |
| 42 | 2.375 | 2.921 | 3.221 | 3.375 | 2.781 | 2.031 | 0.250 |
| 44 | 2.500 | 3.047 | 3.347 | 3.500 | 2.781 | 2.031 | 0.250 |
| 46 | 2.625 | 3.202 | 3.502 | 3.687 | 2.875 | 2.125 | 0.250 |
| 48 | 2.750 | 3.327 | 3.327 | 3.812 | 3.000 | 2.250 | 0.281 |
| 50 | 2.875 | 3.442 | 3.772 | 4.000 | 3.000 | 2.250 | 0.281 |
| 52 | 3.000 | 3.567 | 3.897 | 4.125 | 3.000 | 2.250 | 0.281 |
| 54 | 3.125 | 3.692 | 4.022 | 4.250 | 3.000 | 2.250 | 0.281 |
| 56 | 3.250 | 3.817 | 4.147 | 4.375 | 3.000 | 2.250 | 0.281 |
| 58 | 3.375 | 3.942 | 4.272 | 4.500 | 3.000 | 2.250 | 0.281 |
| 60 | 3.500 | 4.067 | 4.397 | 4.625 | 3.000 | 2.250 | 0.281 |
| 62 | 3.625 | 4.192 | 4.522 | 4.750 | 3.000 | 2.250 | 0.281 |
| 64 | 3.750 | 4.317 | 4.647 | 4.875 | 3.000 | 2.250 | 0.281 |