

HMMB-J28(5625/5625P)



Type: Metal Bellows Seal
 Replacement: Crane 5625/5625PR
 Temperature: -30°C to +205°C



Pressure: ≤ 2 MPa

Speed: ≤ 25 m/s

Material: A, B, Q1, Q2, U1, U2, T, V, Graphite, T6, F, G, M

5625

5625PR

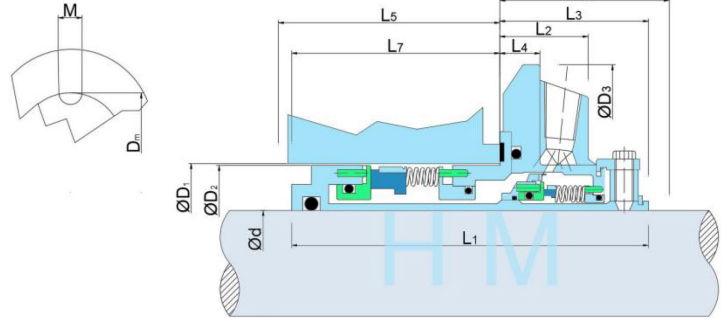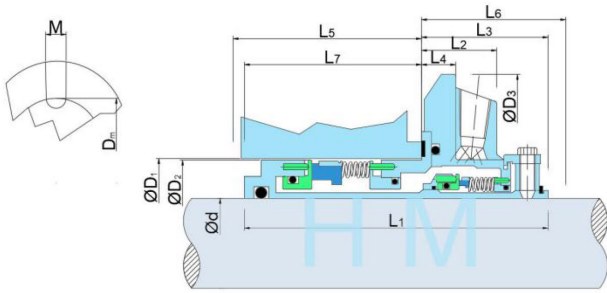

d (mm)	D1 (min)	D1 (max)	D2	D3	L1	L2	L3	L4	L5	L6	L7	M	Dm
24	41.3	48.0	39.7	101.6	94.1	34.4	49.6	13.5	47.7	50.8	44.5	13.3	71.2
25	41.3	48.0	39.7	101.6	84.1	34.4	49.6	13.5	47.7	50.8	44.5	13.3	71.2
28	44.5	51.2	42.9	104.8	97.8	36.7	52.4	13.5	48.6	54.0	45.4	13.3	74.5
30	46.1	56.5	44.8	108.0	97.8	36.7	52.4	13.5	48.6	54.0	45.4	13.3	79.9
32	47.6	58.3	46.0	108.0	97.8	36.7	52.4	13.5	48.6	54.0	45.4	13.3	81.6
33	50.8	61.5	49.3	111.	97.8	36.7	52.4	13.5	48.6	54.0	45.4	13.3	84.8
35	50.8	61.5	49.3	111.	97.8	36.7	52.4	13.5	48.6	54.0	45.4	13.3	84.8
38	57.2	68.1	55.6	123.8	101.5	37.8	54.0	15.1	50.7	55.5	47.5	13.3	91.4
40	60.3	71.4	58.7	127	101.5	37.8	54.0	15.1	50.7	55.5	47.5	14.3	95.7
43	63.0	74.1	61.5	133.4	101.5	37.8	54.0	15.1	50.7	55.5	47.5	14.3	98.4
45	63.0	74.1	61.5	133.4	101.5	37.8	54.0	15.1	50.7	55.5	47.5	14.3	98.4
48	66.7	74.1	65.1	133.4	101.5	37.8	54.0	15.1	50.7	55.5	47.5	14.3	98.4
50	70.0	76.6	68.3	139.7	110.6	40.7	58.7	15.1	55.0	60.3	51.9	14.3	101.6
53	73.0	85.3	71.4	148.8	110.6	40.7	58.7	15.1	55.0	60.3	51.9	17.4	113.5
55	75.0	85.3	73.0	148.8	110.6	40.7	58.7	15.1	55.0	60.3	51.9	17.4	113.5
58	76.2	88.5	74.6	165.1	110.6	40.7	58.7	15.1	55.0	60.3	51.9	17.4	116.0
60	79.4	91.7	77.8	165.1	115.4	43.6	62.6	15.9	56.0	64.2	52.8	17.4	119.9
63	85.7	98.8	84.1	171.5	115.4	43.6	65.1	15.9	53.5	66.7	50.3	17.4	127.0
65	85.7	98.8	84.1	171.5	115.4	43.6	65.1	15.9	53.5	66.7	50.3	17.4	127.0
68	92.1	103.2	90.5	171.5	116.7	41.3	63.5	15.9	59.4	65.1	53.2	17.4	131.3
70	92.1	103.2	90.5	171.5	116.7	41.3	63.5	15.9	59.4	65.1	53.2	17.4	131.3
75	101.6	113.5	100.0	196.9	116.7	45.4	65.1	17.4	54.8	66.7	51.6	20.6	145.3