


HMCS-C11(S10)



Type: Single Cartridge Seal
 Replacement: Chesterton S10
 Temperature: -40 to +204°C
 Pressure: ≤4.0Mpa
 Speed: ≤20m/s
 Material : Q1,Q2,A,B,U1,U2,P,E,V,T,F,G,T2,M5

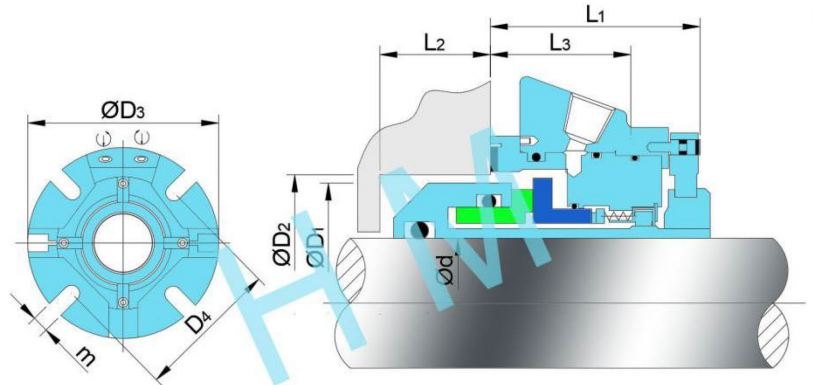

hengmi@mes seal.com

d (mm)	D1	D2		D3 max	D4 min			L1	L2 min	L3	m
		min	max		10mm	12mm	16mm				
25	39.9	41.0	51.1	104	73.0	*	*	52	13.0	30.4	11.5
28	42.4	44.0	51.8	104	73.0	*	*	52	13.0	30.4	13.5
30	44.5	46.0	56.6	104	78.0	*	*	52	13.0	30.4	13.5
32	46.5	48.0	57.7	104	80.0	*	*	52	13.0	30.4	13.5
33	47.4	49.0	58.8	113	80.0	83.0	*	52	13.0	30.4	15.0
35	49.4	51.0	59.2	111	82.0	83.7	*	52	13.0	30.4	15.0
38	55.6	57.2	62.0	114	84.0	89.9	*	54	13.5	30.4	13.5
40	57.5	60.0	68.3	127	89.2	91.7	*	54	13.5	30.4	13.5
43	60.5	63.0	68.8	127	91.9	94.7	*	54	13.5	30.4	13.5
45	62.5	65.0	73.4	140	94.2	96.8	*	54	13.5	30.4	13.5
48	65.5	68.0	73.8	140	97.0	99.8	*	54	13.5	30.4	13.5
50	67.5	70.0	78.5	140	99.3	101.9	*	54	13.5	30.4	17.5
53	72.5	75.0	83.6	153	104.4	106.4	112.0	54	13.5	30.4	17.5
55	72.5	75.0	83.6	153	104.4	106.4	112.0	54	13.5	30.4	17.5
60	77.8	80.0	92.2	153	112.8	114.8	118.9	54	13.5	30.4	17.5
65	84.2	88.9	100.1	164	124.0	126.0	129.8	54	13.5	30.4	17.5
					12mm	16mm	20mm				
70	93	95	110	196	137	141	*	63	21	41	17
75	99	104	119	202	143	147	*	63	21	41	17
80	103	109	122	203	150	154	*	63	21	41	17
85	109	114	128	211	152	156	161	63	21	41	20
90	113	119	132	214	160	164	168	63	21	41	20
95	118	124	137	221	161	165	170	63	21	41	20
100	125	129	144	228	168	172	177	63	21	41	20
110	134	137	154	237	178	182	186	63	21	41	20
120	144	146	164	266	187	191	196	63	21	41	20