


# HMCS-C14(DFS)



Type: Single Cartridge Seal  
 Replacement: Chesterton DFS  
 Temperature: -40 to +204°C  
 Pressure:  $\leq 4.0$  Mpa  
 Speed:  $\leq 20$  m/s  
 Material: Q1,Q2,A,B,U1,U2,P,  
 E,V,T,F,G,T2,M5

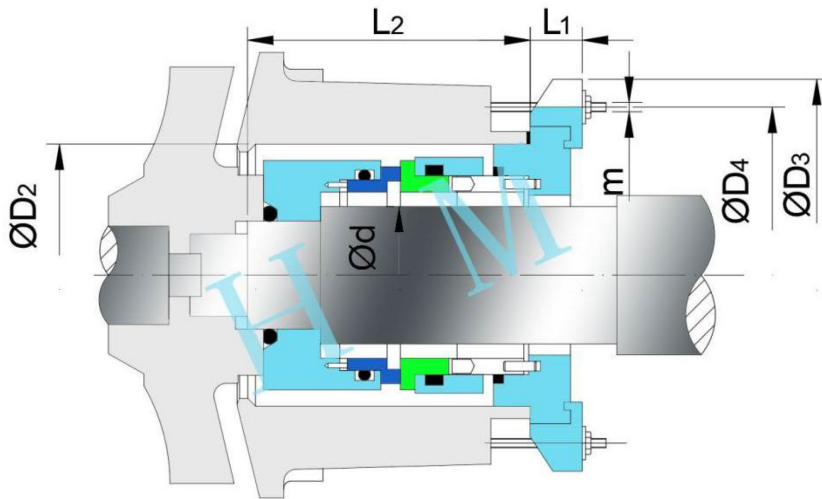

[hengmi@mesal.com](mailto:hengmi@mesal.com)

d ( mm)	D2		D3	D4	L1	L2	m
	min	max					
30	60	60.05	135.6	95	31.1	60.0	M1 0
40	70	70.05	143.8	105	31.1	60.0	M1 0
50	85	85.05	161.3	125	31.1	73.1	M1 2
60	95	95.05	170.1	135	31.1	73.1	M1 2
80	122	122.06	212.1	170	31.5	92.0	M1 6
90	132	132.06	224.3	180	31.5	92.0	M1 6

d ( inch)	D2		D3	D4	L1	L3	m
	min	max					
1.181	2.375	2.377	5.34	3.74	1.22	2.36	3/8- 16
1.575	3.750	3.752	5.66	4.13	1.22	2.36	3/8- 16
1.969	3.375	3.377	6.35	4.92	1.22	2.88	1/2- 13
2.362	3.750	3.752	6.70	5.32	1.22	2.88	1/2- 13
3.150	4.750	4.753	8.35	6.69	1.24	3.62	5/8- 11
3.543	5.197	5.200	8.83	7.09	1.24	3.62	5/8- 11