



HMCS-C15(DFD)



Type: Double Cartridge Seal
 Replacement: Chesterton DFD
 Temperature: -40 to +204°C
 Pressure: ≤4.0Mpa
 Speed: ≤20m/s
 Material : Q1,Q2,A,B,U1,U2,P,
 E,V,T,F,G,T2,M5

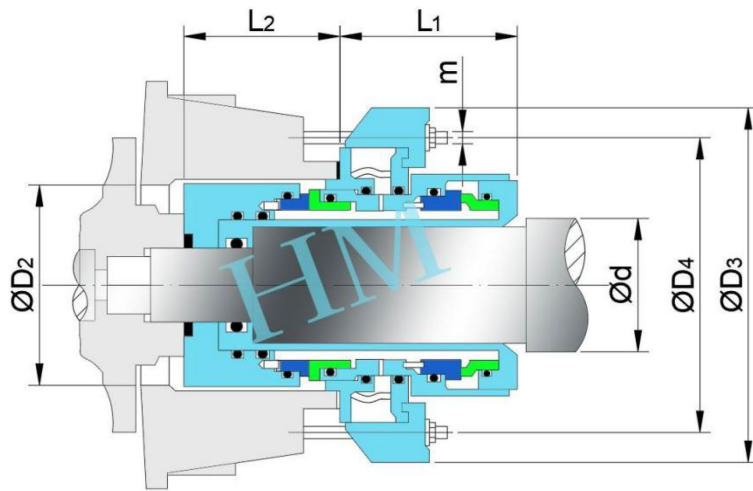

hengmi@mesel.com

d (mm)	D2		D3	D4	L1	L2	m
	min	max					
30	60	60.05	136.6	95	60.7	60	M1 0
40	70	70.05	148.3	105	61.4	60	M1 0
50	85	85.05	164.2	125	61.5	73	M1 2
60	95	95.05	170.1	135	61.5	73	M1 2
80	122	122.06	212.1	170	69.8	92	M1 6
90	132	132.06	224.8	180	69.8	92	M1 6

d (inch)	D2		D3	D4	L1	L2	m
	min	max					
1.181	2.375	2.377	5.38	3.74	2.39	2.36	3/8- 16
1.575	2.750	2.752	5.84	4.13	4.42	2.36	3/8- 16
1.969	3.375	3.377	6.47	4.92	2.42	2.87	1/2- 13
2.362	3.750	3.752	6.70	5.32	2.42	2.87	1/2- 13
3.150	4.750	4.753	8.35	6.69	2.75	3.62	5/8- 11
3.543	5.197	5.200	8.85	7.09	2.75	3.62	5/8- 11