


# HMMB-C02(186)



Type: Metal Bellow Seal  
 Replacement: Chesterton 186  
 Temperature: 150°C to +205°C  
 Pressure :  $\leq 2.0$ Mpa  
 Speed:  $\leq 20$ m/s  
 Material : Q1,Q2,A,B,U1,U2,P,  
 E,V,T,F,G,T2,M5

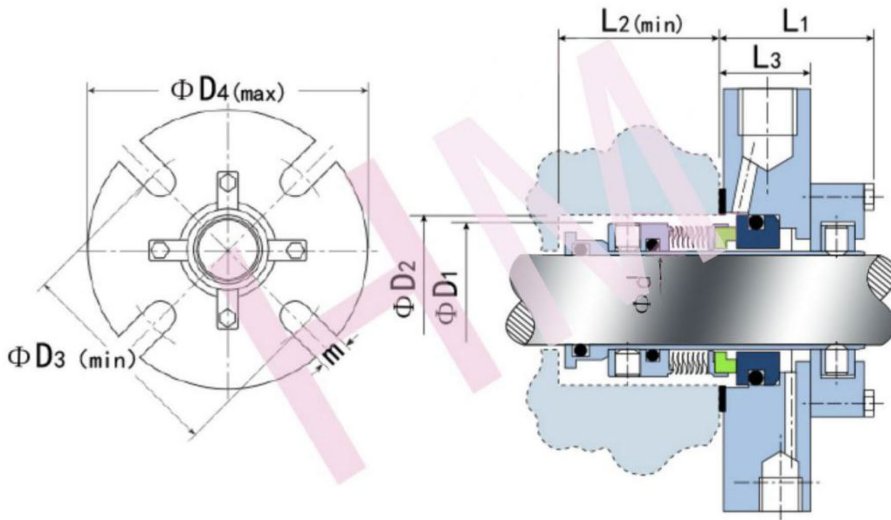

[hengmi@mesel.com](mailto:hengmi@mesel.com)

| d<br>(inch) | D1   |      | D2   |      | D3   |      |      | D4   | L1   | L2   | L3   | m   |
|-------------|------|------|------|------|------|------|------|------|------|------|------|-----|
|             | max  | min  | min  | max  | 3/8" | 1/2" | 5/8" | max  | max  | min  | max  | max |
| 1.000       | 1.69 | 1.75 | 1.86 | 2.81 | *    | *    | 4.25 | 1.79 | 1.45 | 1.03 | 0.44 |     |
| 1.125       | 1.69 | 1.75 | 2.11 | 2.90 | *    | *    | 4.25 | 1.79 | 1.51 | 1.03 | 0.44 |     |
| 1.250       | 1.94 | 2.00 | 2.23 | 3.02 | *    | *    | 4.25 | 1.79 | 1.63 | 1.03 | 0.44 |     |
| 1.375       | 1.94 | 2.00 | 2.36 | 3.15 | *    | *    | 4.25 | 1.79 | 1.63 | 1.03 | 0.44 |     |
| 1.500       | 2.19 | 2.25 | 2.61 | 3.39 | 3.51 | *    | 4.50 | 1.79 | 1.70 | 1.03 | 0.56 |     |
| 1.625       | 2.31 | 2.38 | 2.74 | 3.51 | 3.64 | *    | 5.00 | 1.79 | 1.76 | 1.03 | 0.56 |     |
| 1.750       | 2.44 | 2.50 | 2.86 | 3.62 | 3.75 | *    | 5.50 | 1.79 | 1.82 | 1.03 | 0.56 |     |
| 1.875       | 2.56 | 2.63 | 2.98 | 3.75 | 3.88 | *    | 5.50 | 1.79 | 1.82 | 1.03 | 0.56 |     |
| 2.000       | 2.69 | 2.75 | 3.24 | 4.00 | 4.13 | 4.25 | 5.50 | 1.85 | 1.82 | 1.09 | 0.56 |     |
| 2.125       | 2.81 | 2.88 | 3.36 | 4.13 | 4.25 | 4.38 | 6.00 | 1.85 | 1.88 | 1.09 | 0.69 |     |
| 2.250       | 2.94 | 3.00 | 3.48 | 4.25 | 4.38 | 4.50 | 6.25 | 1.91 | 1.88 | 1.16 | 0.69 |     |
| 2.375       | 3.19 | 3.25 | 3.61 | 4.38 | 4.50 | 4.63 | 6.25 | 1.91 | 1.98 | 1.16 | 0.69 |     |
| 2.500       | 3.31 | 3.38 | 3.61 | 4.38 | 4.50 | 4.63 | 6.50 | 1.98 | 2.04 | 1.22 | 0.69 |     |