


HMCS-DP300Q

Type: Single Cartridge Seal
 Replacement: DEPAC 270P
 Temperature: Elastomer dependent
 Pressure: $\leq 2.80\text{Mpa}$
 Speed: $\leq 35\text{m/s}$
 Material: Q1, Q2, U2, T, P,
 M1, F, G, M

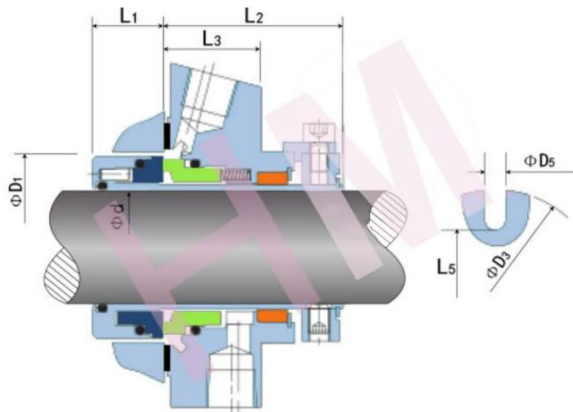

hengmi@meseal.com

| d (mm) | D1 | D3 | D5 | L1 | L2 | L3 | L5 |
|-----------|-------|-----|------|------|------|----|-----|
| 24 | 43.5 | 104 | 12.5 | 19 | 48.0 | 25 | 62 |
| 25 | 43.5 | 104 | 12.5 | 19 | 48.0 | 25 | 62 |
| 28 | 46.5 | 104 | 12.5 | 19 | 48.0 | 25 | 62 |
| 30 | 48.5 | 104 | 12.5 | 19 | 48.0 | 25 | 67 |
| 32 | 50.5 | 104 | 12.5 | 19 | 48.0 | 25 | 67 |
| 33 | 50.5 | 104 | 12.5 | 19 | 48.0 | 25 | 67 |
| 35 | 53.5 | 110 | 12.5 | 19 | 48.0 | 25 | 70 |
| 38 | 56.5 | 125 | 14.7 | 19 | 48.0 | 25 | 75 |
| 40 | 58.5 | 125 | 14.7 | 19 | 48.0 | 25 | 75 |
| 42 | 60.5 | 133 | 14.7 | 19 | 48.0 | 25 | 80 |
| 43 | 61.5 | 133 | 14.7 | 19 | 48.0 | 25 | 80 |
| 45 | 63.5 | 140 | 14.7 | 19 | 48.0 | 25 | 82 |
| 48 | 66.5 | 140 | 14.7 | 19 | 48.0 | 25 | 82 |
| 50 | 68.5 | 140 | 14.7 | 19 | 48.0 | 25 | 87 |
| 53 | 71.5 | 150 | 17.5 | 19 | 48.0 | 25 | 92 |
| 55 | 73.5 | 150 | 17.5 | 19 | 48.0 | 25 | 92 |
| 60 | 78.5 | 160 | 17.5 | 19 | 48.0 | 25 | 100 |
| 65 | 83.5 | 165 | 17.5 | 19 | 48.0 | 25 | 105 |
| 70 | 88.5 | 180 | 17.5 | 19 | 48.0 | 25 | 120 |
| 75 | 100.0 | 190 | 17.5 | 20.5 | 51.5 | 30 | 125 |
| 80 | 105.0 | 190 | 17.5 | 20.5 | 51.5 | 30 | 130 |
| 85 | 110.0 | 220 | 21.5 | 20.5 | 51.5 | 30 | 135 |
| 90 | 115.0 | 220 | 21.5 | 20.5 | 51.5 | 30 | 140 |
| 95 | 120.0 | 220 | 21.5 | 20.5 | 51.5 | 30 | 145 |
| 100 | 125.0 | 220 | 21.5 | 20.5 | 51.5 | 30 | 150 |