


# HMMB-C03(286)



Type: Metal Bellows Seal  
 Replacement: Chesterton 286  
 Temperature: 150°C to +205°C  
 Pressure : ≤2.0Mpa  
 Speed: ≤20m/s  
 Material : Q1,Q2,A,B,U1,U2,P,  
 E,V,T,F,G,T2,M5

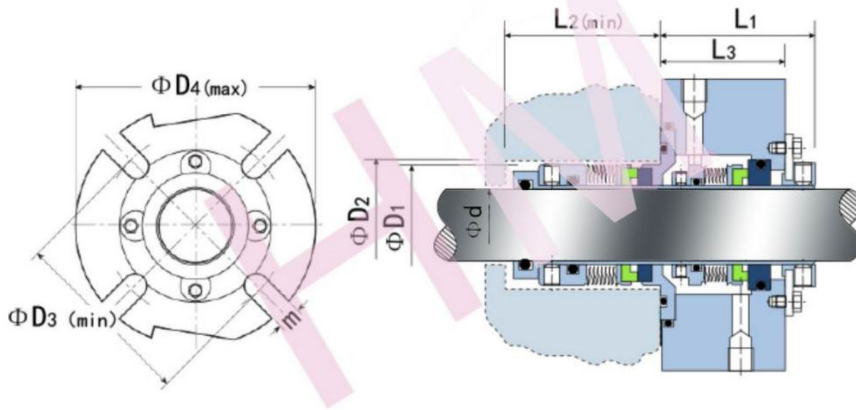

[hengmi@mes seal.com](mailto:hengmi@mes seal.com)

d (inch)	D1		D2		D3			D4	L1	L2	L3	m
	max	min	max	min	3/8"	1/2"	5/8"	max	max	min	max	max
1.000	1.69	1.75	1.88	2.90	*	*	4.13	2.06	2.03	1.7	0.44	
1.125	1.69	1.75	1.88	2.90	*	*	4.25	2.06	2.03	1.7	0.44	
1.250	1.94	2.00	2.13	3.02	*	*	4.25	2.13	2.06	1.76	0.44	
1.375	1.94	2.00	2.19	3.25	*	*	4.25	2.03	2.06	1.67	0.44	
1.500	2.19	2.25	2.38	3.50	3.63	*	4.50	2.13	2.25	1.75	0.56	
1.625	2.31	2.38	2.50	3.56	3.69	*	5.00	2.13	2.21	1.76	0.56	
1.750	2.44	2.50	2.56	3.63	3.75	*	5.50	2.13	2.34	1.76	0.56	
1.875	2.56	2.63	2.69	3.75	3.88	*	5.50	2.13	2.34	1.76	0.56	
2.000	2.69	2.75	2.94	4.01	4.13	*	5.50	2.13	2.34	1.76	0.56	
2.125	2.81	3.00	3.19	4.25	4.38	4.50	6.00	2.13	2.4	1.76	0.69	
2.250	2.94	3.13	3.19	4.25	4.38	4.50	6.25	2.13	2.4	1.76	0.69	
2.375	3.19	3.25	3.44	4.38	4.50	4.63	6.25	2.25	2.31	1.88	0.69	
2.500	3.31	3.38	3.44	4.56	4.81	4.81	6.50	2.19	2.41	1.77	0.69	