


HMCS-F40(PHS)



Type: Single Cartridge Seal
 Replacement: FLEXA PHS
 Temperature: -30°C to +204°C
 Pressure: ≤20Bar
 Speed: ≤22m/s
 Material: B,A,Q1,Q2,U2,E,V,K,
 G,F,G,M5,T6

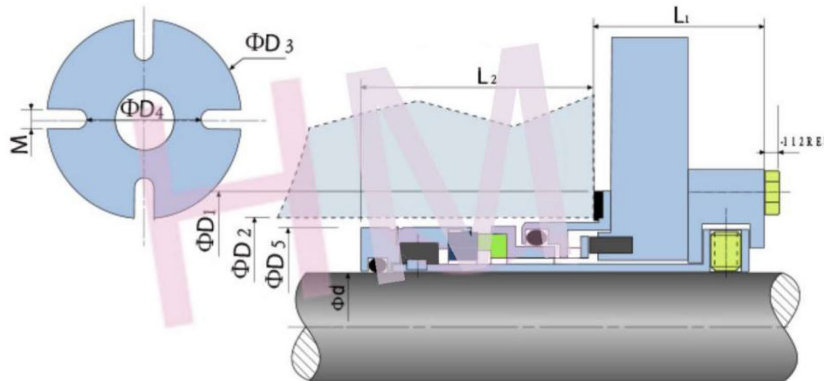

hengmi@mesal.com

d (inch)	D1	D2	D3	D4	D5	L1	L2	M
1.125	2.230	1.790	4.250	2.462	1.700	1.387	1.900	0.437
1.250								
1.375	2.480	2.040	4.250	2.712	1.950	1.387	1.900	0.437
1.500	2.605	2.165	4.500	2.950	2.200	1.387	1.900	0.562
1.625								
1.750	2.990	2.540	5.500	3.188	2.450	1.387	1.900	0.562
1.875	3.105	2.665	5.500	3.313	2.575	1.387	1.900	0.562
2.000	3.230	2.79	5.500	3.570	2.700	1.407	1.894	0.562
2.125	3.490	3.040	6.000	3.687	2.825	1.407	1.894	0.687
2.250								
2.375								
2.500	3.855	3.415	6.500	3.937	3.320	1.453	1.914	0.687
2.625	4.070	3.570	6.500	4.188	3.560			0.687
2.750	4.320	3.820	7.500	4.438	3.650			0.687
2.875								
3.000	4.700	4.075	8.000	5.063	3.900	1.711	2.018	0.687
3.125								
3.250	4.950	4.325	8.250	5.188	4.175	1.550	2.043	0.687