


HMCS-F42(79)

Type: Double Cartridge Seal
 Replacement: FLEXA 79
 Temperature: -30°C to +290°C
 Pressure: ≤ 27 Bar
 Speed: ≤ 22 m/s
 Material : B,A,Q1,Q2,U2,E,V,
 K,G,F,G,M5,T6

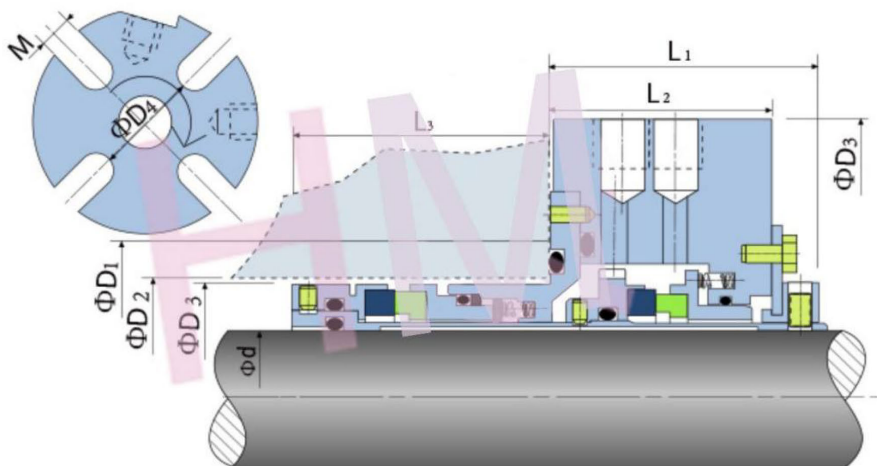

hengmi@mesel.com

d (inch)	D1	D2	D3	D4	D5	L1	L2	L3	M
1.125	2.219	1.750	4.250	2.463	1.700	2.062	1.693	2.031	0.437
1.250	2.344	2.000	4.250	2.749	1.950	2.125	1.699	2.000	0.563
1.375	2.395	2.000	4.250	2.813	1.950	2.062	1.698	2.031	0.437
1.500	2.657	2.250	4.500	2.949	2.200	2.125	1.699	2.062	0.563
1.625	2.782	2.375	5.000	3.124	2.325	2.125	1.699	2.062	0.563
1.750	2.844	2.500	5.500	3.312	2.450	2.125	1.699	2.062	0.563
1.875	2.970	2.625	5.500	3.249	2.575	2.125	1.699	2.062	0.563
2.000	3.095	2.750	5.500	3.569	2.700	2.125	1.699	2.062	0.563
2.125	3.572	2.875	6.00	3.687	2.825	2.125	1.699	2.062	0.688
2.250	3.714	3.000	6.250	3.812	2.950	2.125	1.699	2.062	0.688
2.375	3.750	3.250	6.250	4.000	3.195	2.125	1.699	2.062	0.688
2.500	3.822	3.375	6.500	4.124	3.320	2.125	1.699	2.062	0.688
2.625	4.072	3.625	6.500	4.249	3.560	2.125	1.699	2.062	0.688
2.750	4.250	3.750	7.500	4.438	3.660	2.23	1.729	2.312	0.688
2.875									
3.000	4.718	4.000	8.000	5.062	3.920	2.415	1.916	2.460	0.688
3.125									
3.250	4.750	4.250	8.250	5.188	4.175	2.375	1.874	2.462	0.750
3.375									
3.500	5.215	4.750	8.500	5.437	4.450	2.375	1.874	2.355	0.813
3.625									
3.750	5.469	4.750	8.750	5.688	4.680	2.415	1.916	2.460	0.813
4.750	6.469	5.750	9.750	6.688	5.680	2.525	2.023	2.475	0.813