


HMCS-F03(ISC2PP)



Type: Double Cartridge Seal
 Replacement: Flowserve ISC2PP
 Temperature: -30°C to +205°C
 Pressure: ≤ 2.1 Mpa
 Speed: ≤ 25 m/s
 Material: A,B,Q1,Q2,T,V,K,F,G,M

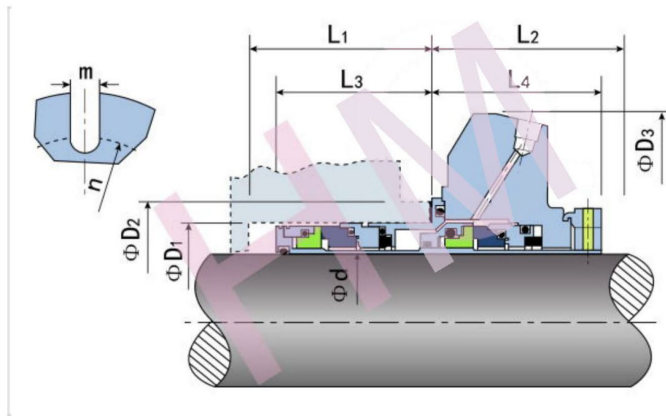

hengmi@mesal.com

d (inches)	D1		D2	D3	L1	L2	L3	L4	N	M
	min	max								
1.000	1.625	1.875	2.115	3.69 ~ 3.75	1.900	2.124	1.838	2.062	2.750	0.440
1.125	1.750	2.000	2.240	3.69 ~ 3.75	1.900	2.124	1.838	2.062	2.875	0.440
1.250	1.89	2.245	2.495	4.19 ~ 4.25	1.900	2.124	1.838	2.062	3.125	0.562
1.375	2.000	2.375	2.615	3.94 ~ 4.00	1.900	2.124	1.838	2.062	3.25	0.440
1.437	2.250	2.688	2.775	4.72 ~ 4.78	1.965	2.184	1.903	2.122	3.75	0.560
1.500	2.250	2.525	2.775	4.69 ~ 4.75	1.965	2.184	1.903	2.122	3.75	0.560
1.625	2.375	2.780	3.030	4.69 ~ 4.75	1.965	2.184	1.903	2.122	3.75	0.560
1.750	2.500	2.875	3.150	4.94 ~ 5.00	1.965	2.184	1.903	2.122	3.875	0.560
1.875	2.625	2.875	3.150	4.94 ~ 5.00	1.965	2.184	1.903	2.122	3.875	0.560
1.937	2.690	2.920	\	\	1.965	2.184	1.903	2.122	\	\
2.000	2.750	3.030	3.280	5.00 ~ 5.12	1.965	2.184	1.903	2.122	4.120	0.688
2.125	2.875	3.125	3.430	5.94 ~ 6.00	1.965	2.184	1.903	2.122	4.250	0.7500
2.250	3.000	3.280	\	\	1.965	2.184	1.903	2.122	\	\
2.375	3.125	3.687	3.975	6.32 ~ 6.38	1.965	2.184	1.903	2.122	4.875	0.750
2.437	3.375	3.450	3.975	6.32 ~ 6.38	1.996	2.153	1.934	2.091	4.875	0.750
2.500	3.375	3.687	3.975	6.32 ~ 6.38	1.965	2.184	1.903	2.122	4.875	0.750
2.625	3.625	4.312	4.615	7.19 ~ 7.25	2.491	2.968	2.429	2.906	5.625	0.880
2.750	3.750	4.312	4.615	7.19 ~ 7.25	2.491	2.968	2.429	2.906	5.625	0.880