
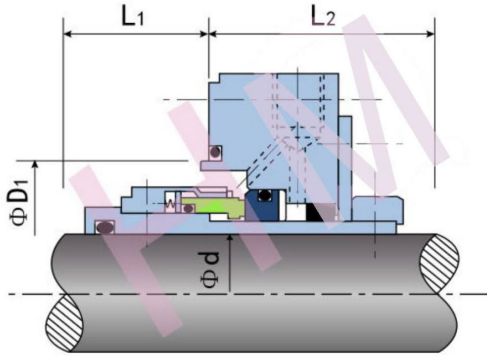


HMCS-F02(QB)



Type: Single Cartridge Seal
 Replacement: Flowsolve QB
 Temperature: -40°C to $+204^{\circ}\text{C}$
 Pressure: $\leq 5.17\text{Mpa}$
 Speed: $\leq 23\text{m/s}$
 Material: A,B,Q1,Q2,T,V,K,F,G,M

d(inch) (max)	D1 (min)	L1 (min)	L2 (min)
0.500	1.718	1.406	2.031
0.563	1.750	1.406	2.031
0.625	1.843	1.406	2.031
0.750	1.968	1.468	2.031
0.813	2.093	1.437	2.063
0.875	2.218	1.437	2.063
1.000	2.343	1.437	2.219
1.125	2.593	1.781	2.219
1.250	2.718	1.781	2.219
1.375	2.843	1.781	2.375
1.500	2.968	1.937	2.500
1.625	3.156	2.000	2.500
1.750	3.281	2.000	2.500
1.875	3.406	1.968	2.594

d(inch) (max)	D1 (min)	L1 (min)	L2 (min)
2.000	3.531	1.968	2.594
2.125	3.843	2.250	2.625
2.250	3.968	2.250	2.625
2.375	4.093	2.250	2.625
2.500	4.218	2.250	2.781
2.625	4.343	2.250	2.781
2.750	4.468	2.250	2.781
2.875	4.593	2.250	2.906
3.000	4.687	2.156	3.000
3.125	4.843	2.156	3.000
3.250	4.968	2.125	3.031
3.375	5.062	2.215	3.031
3.500	5.187	2.125	3.031
3.625	5.562	2.218	3.188

d(inch) (max)	D1 (min)	L1 (min)	L2 (min)
3.750	5.687	2.218	3.188
3.875	5.812	2.218	3.219
4.000	5.937	2.218	3.219
4.125	6.062	2.125	3.313
4.250	6.187	2.125	3.313
4.375	6.312	2.125	3.313
4.500	6.437	2.125	3.313
4.625	6.562	2.125	3.313
4.750	6.937	2.312	3.313
4.875	7.062	2.312	3.313
5.125	7.312	2.312	3.313
5.2500	7.437	2.312	3.313
5.375	7.562	2.437	3.563
5.500	7.687	2.437	3.563